



RV-4 Accessories

Suction Mounting System


for

Safe, secure mounting to the vehicle hood

4-Point Suction Mount (for 1 RV-4) - Weight: 5.7 kg

or

8-Point Suction Mount (for 2 RV-4) - Weight: 9.3 kg

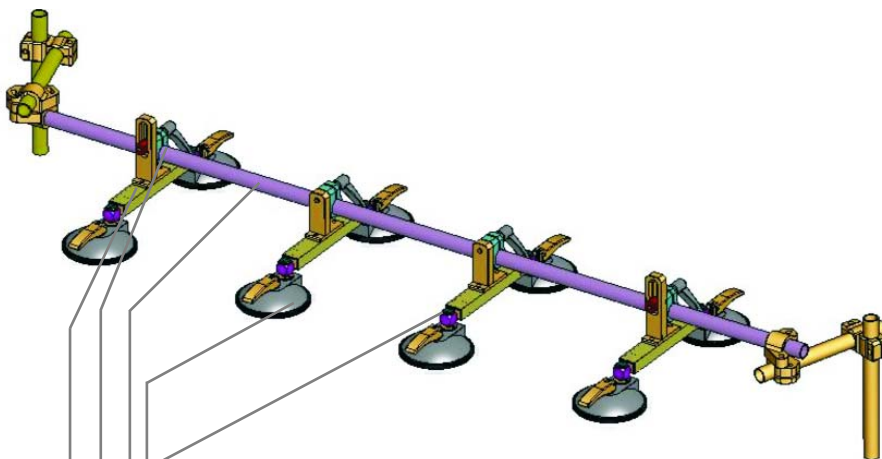

Ball joint enables fast, accurate positioning of the suction mountings; splash-proof for all testing conditions

Suction mount offers approximately 90° of lateral motion relative to the mounting bar

Stable, rigid mounting bar

Stable aluminum clamps with locking levers

Slotted hole for adaptation to different hood curvatures



RV-4 8-Point Suction Mount



RV-4 4-Point Suction Mount



RV-4 Suction Mount - detail

Artikelnr.

4-Point Suction mount

14732

8-Point Suction mount

14731

RV-4 Accessories

Wheel Mount SL

For additional measurement of longitudinal and transversal speed and/or sideslip angle at the wheel.

Suited for sensors with 300 mm working height

Article no.: 12774

Wheel Mount SF and SFII

For additional measurement of longitudinal and transversal speed and/or sideslip angle at the wheel.

Suited for SF sensors with 180 mm working height

Article no.: 14905

Wheel Mount HF-xxxC Sensors

For additional measurement of the dynamic tire flatening at the wheel.

Suited for:

HF-250C Sensors (measurement range 100 ... 350 mm)

HF-500C Sensors (measurement range 125 ... 625 mm)

HF-750C Sensors (measurement range 150 ... 900 mm)

Article no.: 14905

Accessories Wheel Incremental Transducer for RV-4

For additional measurement of the wheel revolution with high time and angle resolution.

Standard Wheel Incremental Transducer with 1000 pulses/revolution.
Further resolutions of 10 ... 20,000 pulses/revolution on request.

Article no.: 15103



In a continuous effort to improve our products, CORRSYS-DATRON reserves the right to change specifications without prior notice.

© 2008 CORRSYS-DATRON Sensorsysteme GmbH
D060-51-01-06_Accessories_E 06/08

CORRSYS-DATRON
www.corrsys-datron.com

International Headquarters
CORRSYS-DATRON Sensorsysteme GmbH
P.O. Box 1349 • 35523 Wetzlar / Germany
Phone: +49-6441-9282-0
Fax: +49-6441-9282-17
e-mail: sales@corrsys-datron.com

North American Headquarters
CORRSYS-DATRON Sensorsystems Inc.
21654 Melrose Avenue • Southfield, MI 48075 • USA
Phone: 248-204-0850 • Toll-free: 800-832-0732
Fax: 248-204-0864
e-mail: USA-sales@corrsys-datron.com

Chinese Headquarters
CORRSYS-DATRON Sensorsysteme GmbH - China
Room 708, JinTianDi International Mansion,
No. 998 RenMin Road, Shanghai (200021), P.R.China
Phone: ++86-21-63114144 • Fax: ++86-21-63114154
e-mail: Xiaoying.Li@corrsys-datron.com