

Absolute Tracker systems and accessories

Version 2.0





This catalogue contains the complete range of products and accessories available for Absolute Tracker systems from Hexagon. Whatever the industry or application, the Absolute Tracker has a solution. All of our products and accessories offer the same premium quality and practical design you would expect from a Swiss made product.


Important note

The information provided by Hexagon in this catalogue is for general information purposes only. All information and arm configurations subject to change without further notice. The images in this document are for reference only and are subject to change without notice. The colour, shape and weight of the products represented here may be different from those delivered. Copyright and Intellectual Property: All elements of this document (including trademarks, text, graphics, logos, photos, etc.) are the property of Hexagon AB in the United States and selected other countries. Therefore, any reproduction and/or representation and/or redistribution in whole or in part, in any electronic form or not, present or future, is prohibited unless express consent is given.



Contents

Applications	6
Absolute Tracker systems	9
Scanning solutions	19
Probing solutions	25
Automation solutions	31
Mounting solutions	41
Reflectors and holders	51
Power cables and batteries	63
Compensations and field checks	73
Other accessories	79
Industrial theodolites	87
Application software	97
HxGN SFx Asset Management	107
Warranties and maintenance	108

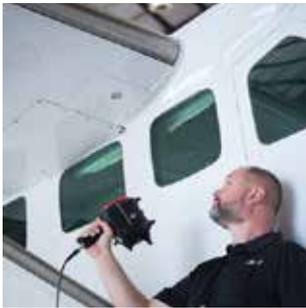


Inspection

Build and adjust

Reverse
engineering



Machine
alignment
Optimisation of
manufacturing
proces

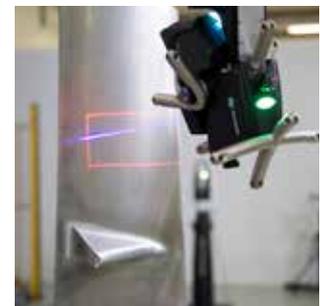



Absolute Tracker systems

Overview	10
Leica Absolute Tracker AT960	12
Leica Absolute Tracker AT930	16
Leica Absolute Tracker AT403	16
Leica Absolute Tracker ATS600	17



The Absolute Tracker

The foundation of absolute accuracy

The unmatched productivity and portability of the Absolute Tracker range is founded on innovative technologies that make it the pinnacle of high-performance metrology on the move.

Absolute accuracy

- The Absolute Interferometer (AIFM) combines the accuracy of an absolute distance meter (ADM) with the speed of an interferometer
- Scanning accuracy to within as little as 50 microns
- Reflector single-point accuracy to within 20 microns
- Patented Absolute Encoders ensure angular accuracy performance with no referencing before use
- Systems calibrated in ISO 170250-certified laboratories for accuracy specified in line with ISO 10360-10 standard

Absolute productivity

- Non-contact measurement data collected at up to 1.2 million points and 300 lines per second
- Orient-to-Gravity for levelling and alignment tasks
- Ultra-large measurement volumes of up to 320 metres in diameter
- Real-time architecture with dynamic performance delivers 1000 Hertz data rate
- Hidden-point measurement with a wireless probe can reduce measurement process time by up to 80 percent

Absolute reliability

- Integrated MeteoStation environmental monitoring unit
- IEC-certified IP54 sealed unit for challenging environments
- Wide operating temperature range of -15 to 45 degrees Celsius
- Integrated mini variozoom delivers a constant field of view in any light conditions
- Full 24-month factory warranty and guaranteed ten years of serviceability

Absolute portability

- All-in-one integrated design
- Built-in WiFi with true access point functionality
- Portable design weighing as little as 7.3 kilograms
- Independent hot-swappable battery power supply
- Convenient flight cases for simple transportation

Our laser trackers

A tracker for every application

Laser trackers come in a range of shapes and sizes and are based on various technological foundations. These are ours, and together they represent a wider range of application solutions than is offered by any other manufacturer.

Leica Absolute Tracker AT960

The flagship of the Absolute Tracker range, offering full 6DoF measuring functionality capable of powering both manual and automated inspection and production systems.

Leica Absolute Tracker AT930


Our premium 3D tracker, for high-accuracy reflector measurements that can support a range of applications.

Leica Absolute Tracker ATS600

The groundbreaking direct scanning laser tracker, delivering metrology-grade measurement from a distance of up to 60 metres.

Leica Absolute Tracker AT403

An ultra-long-range tracker with a high portability factor, designed for rugged use in the most challenging measurement environments.

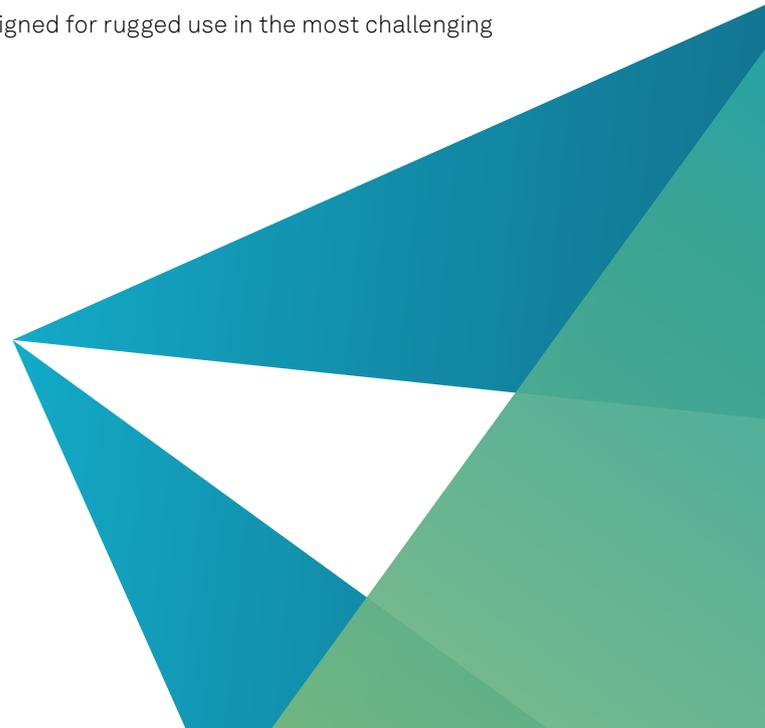

Leica Absolute Tracker AT960

Key features



Overview camera

High-resolution display with live view and multiple zoom levels with no reduction in image quality



PowerLock

Interrupted line of sight automatically re-established with no user interaction

Multifunctionality

Compatible with:



> reflectors and Leica T-Probe for single-point measurement



> AS1, LAS and LAS-XL scanners for non-contact measurement



> automated robotic installations



Real-time data output

1000 Hz low-latency Ethercat data transfer with the optional Real-Time Feature Pack



Hot-swappable battery power

Quick and easy cable-free setup in almost any location



Orient-to-gravity function

Allows for measurement with the Z-axis aligned to gravity – ideal for levelling and alignment tasks



Built-in WiFi

For simple set up and communication with the PC and remote control operation



Large volume

Measure within a volume up to 160 metres in diameter



IP54

IP54 protection

IEC-certified sealed unit guarantees ingress protection against dust and other contaminants



ISO certification

System traceability certified in line with ISO 17025



Real-time remote monitoring

Compatibility with HxGN SFX | Asset Management, the leading solution for of Industry 4.0 asset performance management



GPS location service

Possibility to track location of the Absolute Tracker anywhere in the world, even when it is switched off.

Leica Absolute Tracker AT960



576865

Leica Absolute Tracker AT960-SR

Short-range 6DoF laser tracker system based on Absolute Interferometer. Reflector measurement range up to 6 m, with probing range up to 5 m.

The system consists of:

- 6DoF laser tracker unit AT960-SR
- Calibration Certificate Metrology Gold (827624)
- MTC51 AT930/AT960/ATS600 Transport Container (576891)
- AT Controller (576871)
- MPS21 Power Supply Unit (576873)
- MCS11 Sensor Cable - 1.5 m (576885)
- AT Quick Release Mount incl. Mandrel (576338)
- MCA18 External Temperature Sensor - 2 m (576888)
- Red Ring Reflector - 1.5" (575784)
- MSI26 Universal Stand Fixture (576895)
- MAT33 Optical Cleaning Kit (576898)
- Protective Sensor Cover (827057)
- 24-month warranty*
- HxGN SFx | Asset Management PRO - 12-month subscription
- GPS Location Add-on for SFx Asset Management - 12-month subscription**

576864

Leica Absolute Tracker AT960-MR

Mid-range 6DoF laser tracker system based on Absolute Interferometer. Reflector measurement range up to 20 m, with probing range up to 10 m.

The system consists of:

- 6DoF laser tracker unit AT960-MR
- Calibration Certificate Metrology Gold (827624)
- MTC51 AT930/AT960/ATS600 Transport Container (576891)
- AT Controller (576871)
- MPS21 Power Supply Unit (576873)
- MCS11 Sensor Cable - 1.5 m (576885)
- AT Quick Release Mount incl. Mandrel (576338)
- MCA18 External Temperature Sensor - 2 m (576888)
- Red Ring Reflector (RRR) - 1.5" (575784)
- MSI26 Universal Stand Fixture (576895)
- MAT33 Optical Cleaning Kit (576898)
- Protective Sensor Cover (827057)
- 24-month warranty*
- HxGN SFx | Asset Management PRO - 12-month subscription
- GPS Location Add-on for SFx Asset Management - 12-month subscription**

Leica Absolute Tracker AT960

576863

Leica Absolute Tracker AT960-LR

Long-range 6DoF laser tracker system based on Absolute Interferometer.
Reflector measurement range up to 80 m, with probing range up to 20 m.

The system consists of:

- 6DoF laser tracker unit AT960-LR
- Calibration Certificate Metrology Gold (827624)
- MTC51 AT930/AT960/ATS600 Transport Container (576891)
- AT Controller (576871)
- MPS21 Power Supply Unit (576873)
- MCS11 Sensor Cable - 1.5 m (576885)
- AT Quick Release Mount incl. Mandrel (576338)
- MCA18 External Temperature Sensor - 2 m (576888)
- Red Ring Reflector (RRR) - 1.5" (575784)
- MSI26 Universal Stand Fixture (576895)
- MAT33 Optical Cleaning Kit (576898)
- Protective Sensor Cover (827057)
- 24-month warranty*
- HxGN SFX | Asset Management PRO - 12-month subscription
- GPS Location Add-on for SFX Asset Management - 12-month subscription**

576862

Leica Absolute Tracker AT960-XR

Extended-range 6DoF laser tracker system based on Absolute Interferometer.
Reflector measurement range up to 80 m, with probing range up to 30 m.

The system consists of:

- 6DoF laser tracker unit AT960-XR
- Calibration Certificate Metrology Gold (827624)
- MTC51 AT930/AT960/ATS600 Transport Container (576891)
- AT Controller (576871)
- MPS21 Power Supply Unit (576873)
- MCS11 Sensor Cable - 1.5 m (576885)
- AT Quick Release Mount incl. Mandrel (576338)
- MCA18 External Temperature Sensor - 2 m (576888)
- Red Ring Reflector (RRR) - 1.5" (575784)
- MSI26 Universal Stand Fixture (576895)
- MAT33 Optical Cleaning Kit (576898)
- Protective Sensor Cover (827057)
- 24-month warranty*
- HxGN SFX | Asset Management PRO - 12-month subscription
- GPS Location Add-on for SFX Asset Management - 12-month subscription**



*The 24-month factory warranty period is conditional on the performance of annual maintenance and recertification.

**Available in specific countries and for a limited period.

Leica Absolute Tracker AT930 | AT403



576861

Leica Absolute Tracker AT930

3D laser tracker system based on Absolute Interferometer.
Reflector measurement range up to 80 m.

The system consists of:

- 3D laser tracker unit, AT930
- Calibration Certificate Metrology Gold (827624)
- MTC51 AT930/AT960/ATS600 Transport Container (576891)
- AT Controller (576871)
- MPS21 Power Supply Unit (576873)
- MCS11 Sensor Cable - 1.5 m (576885)
- AT Quick Release Mount incl. Mandrel (576338)
- MCA18 External Temperature Sensor - 2 m (576888)
- Red Ring Reflector - 1.5" (575784)
- MSI26 Universal Stand Fixture (576895)
- MAT33 Optical Cleaning Kit (576898)
- Protective Sensor Cover (827057)
- 24-month warranty*
- HxGN SFx | Asset Management PRO - 12-month subscription
- GPS Location Add-on for SFx Asset Management - 12-month subscription**



576361

Leica Absolute Tracker AT403

3D laser tracker system based on Absolute Distance Meter.
Reflector measurement range up to 160 m, with probing measurement range up to 10 m.

The system consists of:

- 3D laser tracker unit, AT403
- AT Controller
- MCS17 Sensor Cable
- GDF31-I Tribrach
- MCA15 Ext. Temperature Sensor
- Red Ring Reflector (RRR) - 1.5"
- AT400 IR Remote Control
- LAN Cable - 5 m
- MSI26 Universal Stand Adaptor
- 2 GEB242 Batteries
- GKL311 Charger Pro 3000
- AC Adaptor
- MTC75 AT40x Transport Container
- Calibration Certificate Metrology
- Quick Guide
- Compensation SW
- 24-month warranty*

Leica Absolute Tracker ATS600



576971

Leica Absolute Tracker ATS600

Laser tracker system with direct scanning capability. Direct scanning distance range up to 60 m, reflector distance range up to 80 m.

The system consists of:

- Scanning laser tracker unit ATS600
- Calibration Certificate Metrology Gold (878571)
- MTC51 AT930/960/ATS600 Transport Container (576891)
- ATS Controller (576981)
- MPS21 Power Supply Unit (576873)
- MCS11 Sensor Cable - 1.5 m (576885)
- AT Quick Release Mount incl. Mandrel (576338)
- MCA18 External Temperature Sensor - 2 m (576888)
- Red Ring Reflector (RRR) - 1.5" (575784)
- MAC87 Reference Sphere - d=90 mm (576947)
- MSI26 Universal Stand Fixture (576895)
- MAT33 Optical Cleaning Kit (576898)
- Protective Sensor Cover (827057)
- 24-month warranty*
- HxGN SFX | Asset Management PRO - 12-month subscription
- GPS Location Add-on for SFX Asset Management - 12-month subscription**

*The 24-month factory warranty period is conditional on the performance of annual maintenance and recertification.

**Available in specific countries



Scanning solutions

Absolute Scanner AS1 20

Leica T-Scan 5 20

Absolute Scanner LAS | LAS-XL 21

Bundles 22

Absolute Scanner AS1 | Leica T-Scan 5



577366

Absolute Scanner AS1 Kit

High-speed 3D laser scanner for arm and tracker, manual and automated

The system consists of:

- Absolute Scanner AS1 (577367), incl. Certificate
- Absolute Positioner AP21 (577369)
- MAP102 Grip (577370)
- AT Connect Box CB21 (577377)
- MCA110 Positioner Sensor Cable - 10 m (577379)
- MCA24 Battery Cable - 0.75 m (576876)
- MCA114 Trigger/Probe Cable - 0.75 m (855240)
- MCA115 LAN-cable RJ-45 Cat6 - 0.75 m (577384)
- MAC133 Reference Sphere - d=25.4 mm (577401)
- MAP116 Positioner Horizontal Holder (577385)
- MAP117 Positioner Clip Support (577386)
- MSI26 Universal ATC Stand Fixture (576895)
- MTC118 Absolute Scanner Trolley Case (577387)
- 24-Month Warranty*

Compatibility: AT960



Leica T-Scan 5

3D laser line scanner for AT960 systems.

The system consists of:

- 3D laser scanner unit T-Scan 5 incl. transport- ation case
- Scanner Sensor Cable - 10 m
- Scanner Controller (Rev.2.0)
- MPS21 Power Supply Unit (576873)
- MCA47 Trigger/Probe Cable - 2m (576903)
- LAN-cable RJ-45 - 2 m
- MAP39 Horizontal Scanner Holder (576188)
- MAC41 Reference Sphere - d=50 mm (576190)
- T-Collect Interface Software

Compatibility: AT960

Absolute Scanner LAS | LAS-XL



576908

Leica Absolute Scanner LAS

3D laser line scanner for AT960 systems.

The system consists of:

- 3D laser scanner unit LAS
- LASC-211 Scanner Controller (576909)
- MCA62 Scanner Sensor Cable - 10 m (576911)
- MPS21 Power Supply Unit (576873)
- LAN-cable RJ-45 - 5 m (575899)
- MCA47 Trigger/Probe Cable - 2 m (576903)
- MAC64 Reference Sphere - d=30 mm (576913)
- MAC74 Reference Sphere Support (576923)
- MAP65 Horizontal Holder (576914)
- MTC61 LAS Transport Case (576910)

Compatibility: AT960



576943

Leica Absolute Scanner LAS-XL

3D laser tracker system based on Absolute Distance Meter.

Reflector measurement range up to 160 m, with probing measurement range up to 10 m.

The system consists of:

- 3D laser scanner unit LAS-XL
- LASC-211 Scanner Controller (576909)
- MCA63 Scanner Sensor Cable - 20 m (576912)
- MPS21 Power Supply Unit (576873)
- LAN-cable RJ-45 - 5 m (575899)
- MCA47 Trigger/Probe Cable - 2 m (576903)
- MAC87 Reference Sphere - d=90 mm (576947)
- MAP65 Horizontal Scanner Holder (576914)
- MTC85 LAS-XL Trolley Case (576944)

Compatibility: AT960

Scanner bundles



6012677

Leica Absolute Tracker AT960-SR and T-Scan 5 Bundle

Short-range 6DoF Absolute Tracker system bundled with Leica T-Scan 5. Reflector measurement range up to 6 m and scanning range up to 5 m.

The system consists of:

- Leica Absolute Tracker AT960-SR (576865)
- Leica T-Scan 5 (576187)



576864

Leica Absolute Tracker AT960-SR and LAS Bundle

Short-range 6DoF Absolute Tracker system bundled with Leica Absolute Scanner LAS laser scanner. Reflector measurement range up to 6 m and scanning range up to 5 m.

The system consists of:

- Leica Absolute Tracker AT960-SR (576865)
- Leica Absolute Scanner LAS (576908)



6013319

Leica Absolute Tracker AT960-SR and LAS-XL Bundle

Short-range 6DoF Absolute Tracker system bundled with Leica Absolute Scanner LAS-XL laser scanner. Reflector measurement range up to 6 m and scanning range up to 5 m.

The system consists of:

- Leica Absolute Tracker AT960-SR (576865)
- Leica Absolute Scanner LAS-XL (576943)

Scanner bundles



576955

Absolute Scanner Bundle (LAS + LAS-XL)

Pair of complementary 3D laser line scanners for AT960 systems.

Bundle consists of:

- Leica Absolute Scanner LAS (576908) and Leica Absolute Scanner LAS-XL (576943)
- LASC-211 Scanner Controller
- MCA63 Scanner Sensor Cable - 20 m
- MPS21 Power Supply Unit
- LAN-cable RJ-45 - 5 m and MCA47 Trigger/Probe Cable - 2 m
- MAC87 Reference Sphere - d=90 mm and MAC64 Reference Sphere - d=30 mm
- 2x MAP65 Horizontal Scanner Holder and MAC74 Reference Sphere Support
- MTC90 LAS/LAS-XL Trolley Case

Compatibility: AT960



Probing solutions

Leica T-Probe **26**

Leica B-Probe **26**

Styli and extensions **27**

Leica T-Probe | B-Probe



576186

Leica T-Probe III

Portable wireless probing system for AT960 systems. A light-weight measurement probe with configurable function buttons allows measurements in small and large measurement volumes with minimal preparation time. The measurement range of the T-Probe is up to 30 metres in all directions.

The system consists of:

- Wireless probing sensor T-Probe (576186) incl. certificate and transport case
- T-Probe Stylus Adaptor –M5 (576212)
- Ruby Ball Stylus d=6 mm –M5 (576221)
- 2x Stylus Tool for M5 Threaded Styli (576225)
- MAC34 T-Probe Stylus Compensation Tool (576899)
- T-Probe Battery Charger (734195)
- 2x T-Probe Spare Battery (575983)

Compatibility: AT960



576511

Leica B-Probe

Entry-level portable wireless probing solution for AT40x systems.

The system consists of:

- Leica B-Probe
- steel ball stylus 0.5"
- stylus compensation tool
- stylus tool
- micro-USB cable
- Calibration certificate
- 4 AAA batteries
- transportation case

Compatibility: AT40x

Styli and extensions



576231

T-Probe styli kit

Recommended styli kit for Leica T-Probe and Leica B-Probe

The kit consists of:

- Scribe Stylus $r=0.1$ mm - M2 (576219)
- Ruby Ball Stylus $d=3$ mm - M5 (576220)
- Ruby Ball Stylus $d=6$ mm - M5 (576221)
- Ceramic Hemispherical Stylus $d=0.5$ in, M5 (576143)
- Ceramic Hemispherical Stylus $d=1.5$ in, M5 (576144)
- Stylus Extension 100 mm - M5 - carbon fibre - stem $d=20$ mm (576213)
- Stylus Extension 200 mm - M5 - carbon fibre - stem $d=20$ mm (576214)
- Stylus Extension 40 mm - M5 - carbon - stem $d=11$ mm (576217)
- 2x T-Probe Stylus Adaptor - M5 (576212)
- 2x Stylus Tool for M2-M3 Threaded Styli (576223)
- 2x Stylus Tool for M5 Threaded Styli (576225)
- Stylus Adaptor M5-M2 (576226)
- T-Probe Styli Kit Case for Standard Configuration (576211)



576211

T-Probe Styli Kit Case for Standard Configuration

Only case included. Accessories to be ordered separately.



576212

T-Probe Stylus Adaptor - M5

Precision quick release adaptor for T-Probe styli to remove and attach styli without recalibration.

The stylus adaptor has built-in intelligence supporting stylus self-identification.



576213

100 mm - M5 - carbon fibre - stem $d=20$ mm

576214

200 mm - M5 - carbon fibre - stem $d=20$ mm

576215

400 mm - M5 - carbon fibre - stem $d=20$ mm

576216

600 mm - M5 - carbon fibre - stem $d=20$ mm

576217

40 mm - M5 - carbon fibre - stem $d=11$ mm

576218

100 mm - M5 - carbon fibre - stem $d=11$ mm

Styli and extensions



576219 **Scribe Stylus - $r=0.1$ mm - M2**

Compatibility: AT960



576220 **Ruby Ball Stylus - $d=3$ mm - M5**

Compatibility: AT960



576221 **Ruby Ball Stylus - $d=6$ mm - M5**

Compatibility: AT960



576248 **Cylindrical Stylus 22.5 mm - $d=3$ mm - M2**

Compatibility: AT960



576222 **Edge Stylus M5**

Comes with edge sphere 0.5", magnetic stylus M5 and compensation sphere 0.5".

Compatibility: AT960



576223 **Stylus Tool for M2 and M3 Threaded Styli**

Compatibility: AT960



576224 **Stylus Tool for M4 Threaded Styli**

Compatibility: AT960



576225 **Stylus Tool for M5 Threaded Styli**

Compatibility: AT960, AT403

Styli and extensions



576226

M5/M2 Stylus Adaptor

An adaptor for connecting M2-threaded styli to a M5 connector.

Compatibility: AT960



576227

M5/M4 Stylus Adaptor

An adaptor for connecting M4-threaded styli to a M5 connector.

Compatibility: AT960



576228

M4/M5 Stylus Adaptor

An adaptor for connecting M5-threaded styli to a M4 connector.

Compatibility: AT960



576143

Ceramic Hemispherical

Compatibility: AT960

576144

Stylus d=0.5" - M5

Stylus d=1.5" - M5



576403

Punch Tool - M5

A stylus used for punching scribe lines on an object for the next manufacturing process.



576408

Punch Tool Replacement Tip

Replacement Tip for Punch Tool - M5 (576403).



577356

90Deg. Adapter for T-Probe

90-degree adaptor with M5f/M5m thread. Compatible with all M5 stylus and CFK extensions. Used for 90-degree stylus configurations with Leica T-Probe.



576514

Steel Ball Stylus

M5 d=0.5" - L=55 mm



Automation solutions

Leica T-Mac **32**

Accessories **34**

Leica T-Mac



576400

T-Mac Basic TMC30-B

T-Mac is a specifically developed sensor using Hexagon's 6DoF technology to extend product offering. T-Mac is designed to be used in combination with robots and large machines especially for positioning with high accuracy. T-Mac has the possibility to mount it on a robot or machine and the housing already has 4 reflector nests included. These reflector positions can be used to establish a local coordinate system for object orientation or robot alignment. As an option a tool exchange interface from Sandvick can be adapted.

The system consists of:

- T-Mac basic TMC30-B (576400) including certificate and transportation case
- T-Probe cable - 20 m (575973)



576410

T-Mac Inspect TMC30-I

The T-Mac is a 6DoF machine control probe for use with the Absolute Tracker AT900 series trackers and T-Cam's. The TMC30-I is the deluxe version of the probe for machine positioning, alignment, calibration and all inspection tasks (such as touch trigger).

The system consists of:

- T-Mac Inspect TMC30-I (576410) including certificate and transportation case
- T-Probe Cable, 20 m (575973)

Note: The T-Mac Inspect cable must be ordered separately (10 m - 576509, 30 m - 576510).

Compatibility: AT930, AT960

576404

T-Mac Update Kit Basic to Inspect

This Kit allows older T-Mac's to be upgraded in order to be used in new inspection systems.

The Upgrade Kit only contains the internal hardware to convert a TMC30 to a TMC30-I, no additional cables or interfaces are included.

Please contact service to make sure that the existing T-Mac is capable of receiving this upgrade

Note: T-Mac Inspect cable must be ordered separately.

Compatibility: AT930, AT960

Leica T-Mac



576396

Leica T-Mac Multiface TMC30-M

The T-Mac Multiface is a 6DoF machine control probe for use with any 6 DoF laser tracker. The TMC30-M is the multiface version of the TMC30-I for machine positioning, alignment, calibration and all inspection tasks (such as touch trigger measurement).

The system consists of:

- TMC30-M sensor, including certificate and transportation case
- Leica T-Probe cable - 20 m (575973)

Note: T-Mac Inspect cable (576509, 576510) must be ordered separately.

Compatibility: AT960



576398

T-Mac Frame TMC30-F

The T-Mac Frame TMC30-F is a configurable 6DoF machine control probe for use with any Hexagon 6 DoF Lasertracker. The TMC30-F can be used to create customised multisided probe configurations with anywhere from 1 to 4 frames (faces). The T-Mac Frame TMC30-F can be used to extend angular measuring range of the T-Mac Frame TMC30-F Starter Kit (576397) or an existing T-Mac Basic TMC30-B (576400) or T-Mac Inspect TMC30-I (576410). For TMC30-B or TMC30-I the Frame extension interface for T-Mac (5003434) is needed (orderable from Laser Tracker Service Unterentfelden, Switzerland, please contact ps.ch@hexagonmetrology.com).

The system consists of:

- T-Mac Frame TMC30-F (576398) incl. certificate and cardboard transportation box
- Connection Cable T-Mac/CPU Box, 0.6 m or 1.8 m (804823, 804824)

Note: The T-Mac Frame TMC30-F does NOT include a mount for touch trigger inspection device. Please refer to 576395 Upgrade TMC30-F to Inspect.

Compatibility: AT960



576397

T-Mac Frame TMC30-F Starter Kit

The T-Mac Frame TMC30-F Starter Kit is a configurable 6DoF machine control probe for use with any Hexagon 6 DoF Laser tracker. The T-Mac TMC30-F Starter Kit can be used to create customised multisided probe configurations with anywhere from 1 to 4 frames (faces). To the T-Mac Frame TMC30-F Starter Kit up to 3 additional T-Mac Frames TMC30-F (576398) can be connected in addition.

The system Kit consists of:

- T-Mac Frame TMC30-F (576398) incl. certificate and cardboard transportation box
- CPU Box for TMC30-F (805143)
- T-Probe Cable, 20 m (575973)
- Connection Cable T-Mac/CPU Box, 0.6 m or 1.8 m (804823, 804824).

Compatibility: AT960

Accessories for automation solutions



576406

Automation Interface Controller

The Automation Interface Controller provides handling capabilities of up to four laser trackers and multiple measurement devices such as T-Mac, T-Scan or external trigger source. Its digital I/O interface allows for bidirectional communication to a robotic or machine controller.

Includes: Product CD, power cable and 5 m LAN cable (575899).

Compatibility: AT930, AT960



576964

Automation Switch Controller MAA99

The Automation Switch Controller (ASC) is a device for automatically switching the probe and probe/trigger cable from one tracker to another and/or from one target to another. The ASC provides four pairs of probe and probe/trigger sockets for laser tracker connections and four pairs of probe and probe/trigger sockets for target (probe) connections. The ASC is a device that enables the use of multiple laser trackers and accessories in any combination, for example a Leica T-Scan 5 or Leica T-Mac could be connected to different laser trackers to optimise accessibility. Sample setup with two laser trackers and two T-Scan systems: the connection between a T-Scan system and a laser tracker is a simple probe/trigger cable. If two T-Scan systems and two laser trackers are used simultaneously, each laser tracker can only measure on the T-Scan that is physically connected to its controller by a probe/trigger cable. If it is required that each of the laser trackers in such a system be able to measure with each of the scanners, an ASC is needed.

Compatibility: AT960



576872

RTFP-EC Real Time Feature Pack - EtherCAT

The Real Time Feature Pack (RTFP) for AT930/960 Absolute Tracker (AT Controller) is designed to provide cyclic measurement data in real-time over the EtherCAT industrial fieldbus protocol. The RTFP acts as a slave in the external automation bus system.

Note: The RTFP can be fitted in the factory or service Unterentfelden only.

Compatibility: AT930, AT960



576959

T-Scan CFK-Extension 400

576960

T-Scan CFK-Extension 550

576961

T-Scan CFK-Extension 700

Accessories for automation solutions



577373

Interface Adaptor AP21 - MAA105

Consisting of:

- MAA105 Interface Adaptor AP21 (577373)
- Torque wrench 2.0 Nm (928792)
- Screw Set 8 x M4 x 14 12.9 ISO 4762
- MAA Autom. Adaptor Instruction Sheet-EN (939299)

Compatibility: AT960, AS1



577374

Straight Adapter - 139 mm - MAA106

Consisting of:

- MAA106 Straight Adaptor - 139 mm (577374)
- MAA Autom. Adaptor Instruction Sheet-EN (939299)

Compatibility: AT960, AS1



577375

45° Adaptor - 67 mm - MAA107

Consisting of:

- MAA107 45° Adaptor - 67 mm (577375)
- Screw Set 3 x M4 x 25 ISO 4762
- MAA Autom. Adaptor Instruction Sheet-EN (939299)

Compatibility: AT960, AS1



577376

ToolChanger/Robot Flange - MAA108

Consisting of:

- MAA108 ToolChanger/Robot Flange (577376)
- Screw Set 8 x M4 x 10 ISO 4762
- MAA Autom. Adaptor Instruction Sheet-EN (939299)

Compatibility: AT960, AS1



577378

Top Hat Rail Adaptor - MAA109

Adaptor can carry the following articles:

- AT Connect Box CB21 (577377)
- AT Controller (576871)
- MPB25 Battery (576875), MPB100 Battery (576965)
- MAS71 Power Supply Unit Fixture (576920)

Adaptor is compatible with the following top hat rails:

- IEC/EN 60715 – 35 x 7.5 and IEC/EN 60715 – 35 x 15

Compatibility: AT960, AS1

Accessories for automation solutions



577388
577389
577390

Automation GigE-Data Cable

Cable for connecting the Automation Signal Splitter GigE/Probe (577396) to a robot adaptor and tool changer. The cable is equipped with M12 x-coded male plugs. To extend the cable length a MCA128 Automation M12 Gender Changer - F (577397) is required (to be ordered separately). The maximum supported cable length is 80 m with up to maximum 6 plug connections. The cable is green.

MCA119 - 10 m
MCA120 - 30 m
MCA121 - 50 m

Compatibility: AT960, AS1



577391
577392
577393

Automation Probe-Data Cable

Cable for connecting the Automation Signal Splitter GigE/Probe (577396) to a robot adaptor and tool changer. The cable is equipped with M12 x-coded male plugs. To extend the cable length a MCA128 Automation M12 Gender Changer - F (577397) is required (to be ordered separately). The maximum supported cable length is 80 m with up to maximum 6 plug connections. The cable is black.

MCA122 - 10 m
MCA123 - 30 m
MCA124 - 50 m

Compatibility: AT960, AS1



577394

Automation GigE-Data Cable MCA125 - 0.5 m

Cable for connecting the tool changer (robot side) and the robot adaptor (577371, 577372). The cable is equipped with M12 x-coded male plugs. The cable has a length of 0.5 m and is green.

Compatibility: AT960, AS1



577395

Automation Probe-Data Cable MCA126 - 0.5 m

Cable for connecting the tool changer (robot side) and the robot adaptor (577371, 577372). The cable is equipped with M12 x-coded male plugs. The cable has a length of 0.5 m and is black.

Compatibility: AT960, AS1

Accessories for automation solutions



577397

Automation M12 Gender Changer – F MCA128

Gender Changer connects any of the Automation GigE- or Probe-Data Cables (577388-577395). It's used to extend the cable configuration. The two Automation M12 Gender Changer - F have M12 x-coded female sockets and are delivered with a wall bracket.

Compatibility: AT960, AS1



577398

577399

Automation Robot I/O Cable

Cable for connecting the AT Connect Box CB21 (577377) with the robot or NC machine controller. The cable has a Lemo Type B plug (CB21 side) and 19 open wires - labelled (robotic side).

MCA129 - 20 m

MCA130 - 50 m

Compatibility: AT960, AS1

The automation accessories shown in this catalogue are only a selection of the larger range of solutions offered.

For detailed system configurations (e.g. machine adaptors, cables, etc.), please contact your local commercial operation or system integrator.

Accessories for automation solutions



576192

Automation Trigger Cable MCA37 - 2 m

The MCA37 Automation Trigger cable connecting the T-Scan 5 Controller to the Automation Interface Controller (576406).

Compatibility: AT960, T-Scan 5



576193

T-Scan Sensor Extension Cable MCA38 - 10 m

Cable providing an extension of 10 m, resulting in a total T-Scan 5 cable length configuration of 20 m (10 m + 10 m).

Compatibility: AT960, T-Scan 5



576194

T-Scan Controller Automation Cable MCA42 - 2 m

Cable, length 2 m, for connecting the T-Scan 5 Controller (819828) to the Automation Interface Controller (576406).

Compatibility: AT960, T-Scan 5



576196

Automation Sensor Cable MCA44 - 10 m

The MCA44 Automation Sensor Cable 10 m connecting the T-Scan 5 or T-Mac Inspect (22pin T-Scan ODU-female connector) to the Automation Interface Controller (576406) or to the Automation Multiplex Box (576407).

Compatibility: AT960, T-Scan 5, T-Mac



T-Scan Sensor Automation Cable

Cable for connecting the T-Scan 5 (T-Scan ODU-female connector) to the T-Scan 5 Controller (819828).

Note: The MCA76 can also be used as a T-Scan Sensor Extension Cable.

576928

MCA76 - 30m

576197

MCA45 - 50 m

Compatibility: AT960, T-Scan 5

Accessories for automation solutions



576509 10 m
576510 30 m

T-Mac Inspect TMC30-I Cable

For connecting the TMC30-I to the Automation Interface Controller 576406 or MUX box 576407 directly.

Automation Robot Cable

For Connecting the Automation Interface Controller 576406 to the Robotic or NC Machine controller.

576505 20 m
576506 50 m



576878

Automation Trigger/Probe Y-Cable MCA48

The MCA48 connecting the AT960 Tracker Controller with the Automation Interface Controller (576406). The y-ends of the cable must be extended with the standard T-Probe Cable (575972, 575973, 576185) and Trigger Cable (576507, 576508) > to be ordered separately.

Automation Interface Cable

connecting the Automation Interface Controller (576406) to the Automation Multiplex Box (576407).

576929 MCA77 - 30 m
576879 MCA49 - 50 m

576931

T-Mac cable MCA78 - 1.0 m

with ODU connector (male sensor side)



Mounting solutions

Tracker mounting solutions 42

Scanner holders 49

Tracker mounting solutions



6009768

Stand Set MST27

Set consists of

- MST27 Stand Tube Extension (576881)
- Absolute Tracker Stand (575997)

Note: 235-5 Instrument Adaptor 577261 (3.5" to 5/8" thread) from Brunson required to mount AT40x sensors (not included).

Compatibility: AT403, AT930, AT960, ATS600



576881

Stand Tube Extension MST27

Designed for AT930/960 or ATS600 systems. Fits on the Absolute Tracker Stand (575997) (to be ordered separately).

Compatibility: AT930, AT960, ATS600



575997

Absolute Tracker Stand

Equipped with three levelling screws and shock absorbing wheels.



576954

Adjustable Stand Extensions

The adjustable column, also called the "intermediate tube" turns the Portable Metrology Tripod MST36 (576901) into an adjustable stand. Employs a hand-wheel-driven worm gear for up-and-down adjustment of the column. The collar may then be clamped to avoid any inadvertent movement. An Adaptor on top of the intermediate tube provides a standard external 3½"-8 thread for mounting instruments or other adaptors.

The adjustable column adds an additional 494 mm of height.

Tracker mounting solutions



576901

Portable Metrology Tripod MST36

Collapsible tripod with carbon legs designed for Absolute Tracker and Absolute Arms.

Tripod consists of:

- Integrated bulls eye level and 1 kit of pad feet
- Instrument adaptor for AT930/960 or Absolute Arm (3.5"x8 thread) and for AT40x (5/8" thread)
- 3 integrated fixture positions for AT Controllers (576871, 576368) or MPB25, battery external Li-Ion 37V/8.1Ah (576875)

Adjustable height: 83 - 118 cm | Weight: 14.2 kg

Compatibility: AT403, AT930, AT960, ATS600



576904

Tripod Wheel Assembly Kit MAS52

Offers additional portability for the MST36 Tripod (576901). The wheels are engaged and disengaged simply by unlocking the telescoping leg and rotating it, putting the wheel in an upper or lower position.

Note: The wheel options must be installed at the factory and should be ordered together with the tripod.



576919

Tripod Levelling Kit MAS70

Used on MST36 Tripod (576901) to establish a gravity-based coordinate system when measurements require a 3D device. Installation requires a simple hand adjustment to insert the levelling screw above the point or pad foot on each leg. The compact design adds only 17 mm of leg length in the retracted position while providing a large 19 mm precision adjustment range.

Sold in sets of 3 | Weight: 0.3 kg each

Note: Wheel Assembly Kit (576904) will not operate with the Tripod Levelling it installed.



577261

Instrument Adapter 235-5

For instruments with 5/8"-11 mount requirements: converts a 3½"-8 standard external instrument thread on any stand or adaptor into a 5/8"-11 external thread to accommodate most theodolites or other instruments.

Effective height: 27.7 mm (vertical distance between the lower interface surface and the top, on which the instrument would rest). Internal thread: 3½"-8

Material: stainless steel | Weight: approx. 1.36 kg

Compatibility: AT403

Tracker mounting solutions



576920

Power Supply Unit Fixture MAS71

Fixture to hold a power supply unit by attaching to the stand, keeping the power supply off the ground. Holds the following power supply units:

- MPS21 Power Supply Unit (576873)
- AC/DC Adapter 15V (773058)

Attaches to following stands/fixtures: MST27 Stand Tube Extension (576881), MST36 Portable Metrology Tripod Carbon (576901), MSI26 Universal ATC Stand Fixture (576895)



576895

Universal ATC Stand Fixture MSI26

Universal stand fixture for AT Controller with reusable Velcro strap (0.52 m).

Compatible with AT Controller (576871, 576368), ATS Controller (576981), MPB25, Battery external Li-Ion 37V/8.1Ah (576875)



576354

Stand Adaptor MAS12

Fits on the AT Stand Extension (576337). The Stand Adaptor is designed in such way that the tilting axis of the AT40x is at the same height as the AT901 when used on the AT Stand Extension (576337).

Compatibility: AT403



576337

AT Stand Extension

Base stand extension for AT laser trackers. The AT Stand Extension does not include the AT Quick Release Mount (576338), which is already integrated with any AT901. The AT Stand Extension can be extended either with the Stand Extension 380 mm (575998) or Stand Extension 180 mm (575999)

Compatibility: TM6100A, AT403



576352

576353

Tribrach PRO - light grey

GDF321-I without Optical Plummet

GDF322-I with Optical Plummet

Compatibility: TM6100A, AT403

Tracker mounting solutions



417677

Measuring slide (single direction) GMT5

with maximum working range 40 mm; least count 0.01 mm.

Compatibility: TM6100A, AT403




417678

Adapter set GAD12 for mounting GMT5

translation stage onto any Leica tribrach; includes tribrach to mount instrument; typical adapter set for theodolites and total stations.

Compatibility: TM6100A, AT403



417679

Adapter set GAD13

for mounting GMT5 translation stage onto 5/8" thread; includes adapter plate with 5/8" thread to mount instruments; typical adapter set for levels.

Compatibility: TM6100A, AT403



576952

Levelling Unit MAL93

Used to support the fine levelling process for the Orient-to-Gravity setup. Equipped with two fine-adjust elements (90°-oriented) to adjust the laser tracker's inclination. The MAL93 can be mounted on any compatible instrument stand with a 3.5"x8 thread. The AT Quick Release Mount (576338) is attached to the upper MAL93 interface to fix the laser tracker in place.

Compatibility: AT930, AT960, ATS600
(reduced motor servo control loop parameters are required)

576338

AT Quick Release Mount

For mounting an AT9x0 or AT901 system on the AT Stand Extension (576337), AT Mounting Plate (576336) or any other compatible instrument stand with 3.5"x8 thread adaptor.

Tracker mounting solutions



576349

Aluminium Tripod AT08

Light-weight tripod with 3.5"x8 thread for increased portability. Suitable for all Absolute Tracker systems and Absolute Arm systems up to 3.5 m length. The tripod interface is compatible with the AT Quick Release Mount (576338).

Tripod height (working position): 815 mm (fixed)
Dimensions: 25 x 25 x 100 cm (folded) | Weight: 12 kg

Note: 235-5 Instrument Adaptor 577261 (3.5" to 5/8" thread) from Brunson required to mount AT40x sensors (not included).

Compatibility: AT403, AT930, AT960



575483

Aluminium Tripod AT21

Robust and light-weight tripod with 5/8" thread. Suitable for industrial theodolites and AT403, as well as laser tracker field check equipment for ATS600 and AT9x0 models.

Instrument height: 1.4 - 2.1 m | Weight: 11 kg

Compatibility: AT403, TM6100A



575484

Aluminium Tripod AT28

Robust and light-weight tripod with 5/8" thread and adjustable centre column. Suitable for industrial theodolites and AT403, as well as laser tracker field check equipment for ATS600 and AT9x0 models.

Instrument height: 1.4 - 2.8 m | Weight: 12 kg

Compatibility: AT403, TM6100A



575837

Tripod Adaptor

To be used for various alignment or compensation measurements. Thread for tripod 5/8". Bore hole 12 mm (supports 577104/577208, not included)

Compatibility: AT403, AT930, AT960, ATS600

Tracker mounting solutions



577351

AT Base Plate Type A

Base plate with non-adjustable pointed-tip feet for AT40x, AT930/AT960 and ATS600 sensor series. Adaptation 5/8" thread and borehole pattern for Quick Release Adaptor. Quick Release Adaptor not included. All stainless-steel finish. Plate height: approx. 40 mm | Weight: 9 kg.

Compatibility: AT403, AT930, AT960, ATS600



577352

AT Base Plate Type B

Base plate with adjustable machine feet for levelling for AT40x, AT930/960 and ATS600 sensor series. Adaptation 5/8" thread and borehole pattern for Quick Release Adaptor. Type B is delivered with non-slip rubber-type machine feet. Quick Release Adaptor not included. All stainless-steel finish. Plate height: approx. 60 mm | Weight: 10 kg.

Compatibility: AT403, AT930, AT960, ATS600



577353

AT Base Plate Type C

Base plate with adjustable machine feet for levelling for AT40x, AT930/AT960 and ATS600 sensor series. Adaptation 5/8" thread and borehole pattern for Quick Release Adaptor. Type C is delivered with stainless-steel type machine feet. Quick Release Adaptor not included. All stainless-steel finish. Plate height: approx. 60 mm | Weight: 10 kg.

Compatibility: AT403, AT930, AT960, ATS600



577354

AT Base Plate Type D

Base plate with adjustable machine feet for levelling for AT40x, AT930/AT960 and ATS600 systems. Adaptation 5/8" thread and borehole pattern for Quick Release Adaptor. Type D is delivered with pointed-tip feet. Quick Release Adaptor not included. All stainless-steel finish. Plate height: approx. 60 mm | Weight: 9.5 kg.

Compatibility: AT403, AT930, AT960, ATS600



577355

Pointed Screw Kit for AT Base Plates - 80 mm

Conversion kit with pointed-tip feet for Base Plate Types B and C. Stainless steel.

Tracker mounting solutions



576336

AT Mounting Plate

Allows for mounting Absolute Tracker systems onto machine beds. Does not include AT Quick Release Mount (576338).

Compatibility: AT930, AT960, ATS600



576339

AT Magnetic Mount

Allows for mounting Absolute Tracker systems onto a magnetic surface. Does not include AT Quick Release Mount (576338) and AT Mounting Plate (576336).

Compatibility: AT930, AT960, ATS600



576897

Rack Fixture MAA32 ATC 19"

Designed to hold the AT Controller of the AT930/960 series or ATS Controller of the ATS600 in standard 19"-rack systems.



576940

Wall Mount Fixture 0°/180° MAS80

Fixture for upright or inverted adaptation of Absolute Tracker systems onto concrete walls or structures. Adaptation of Leica Quick Release for AT930/960 or ATS600, or 5/8" thread for AT40x sensors. Integrated safety lever for Quick Release handle.

Fixture contents:

- MAS80 Wall Mount
- Set of screws for adaptation of Quick Release and washers and heavy duty anchors for concrete walls
- Set of cable ties for sensor cables
- 5/8" threaded bolt for AT40x sensors

Compatibility: AT403, AT930, AT960, ATS600



576941

Wall Mount Fixture 35° MAS81

Fixture for inclined installation of AT930/960/ATS600 sensors onto concrete walls or structures. Adaptation of Leica Quick Release for AT930/960/ATS600 systems. Integrated safety lever for Quick Release handle.

Fixture Content:

- MAS81 Wall Mount
- Set of screws for adaptation of Quick Release, washers and heavy duty anchors for concrete walls
- Set of cable ties for sensor cables

Compatibility: AT930, AT960, ATS600

Scanner holders



576189

Vertical Scanner Holder MAM40

For holding the scanner at a vertical orientation. Mounts to the MMC31 Metrology Measurement Cart (576181).

Note: Not compatible with MMC91 Absolute Tracker Measurement Cart (576950)

Compatibility: T-Scan 5



576188

Horizontal Scanner Holder MAP39

For holding the Leica T-Scan 5 scanner at a horizontal orientation.

Compatibility: T-Scan 5



577385

Horizontal Positioner Holder MAP116

Horizontal Positioner holds the Absolute Positioner AP21 with its sensor attached in a safety position.

Compatibility: AS1



577386

Positioner Clip Support MAP117

Positioner Clip clips to the MAP102 Grip and holds the Absolute Positioner AP21 with its sensor attached in a temporary position.

Compatibility: AS1




576914

Horizontal Scanner Holder MAP65

For holding the scanner at a horizontal orientation.

Compatibility: LAS

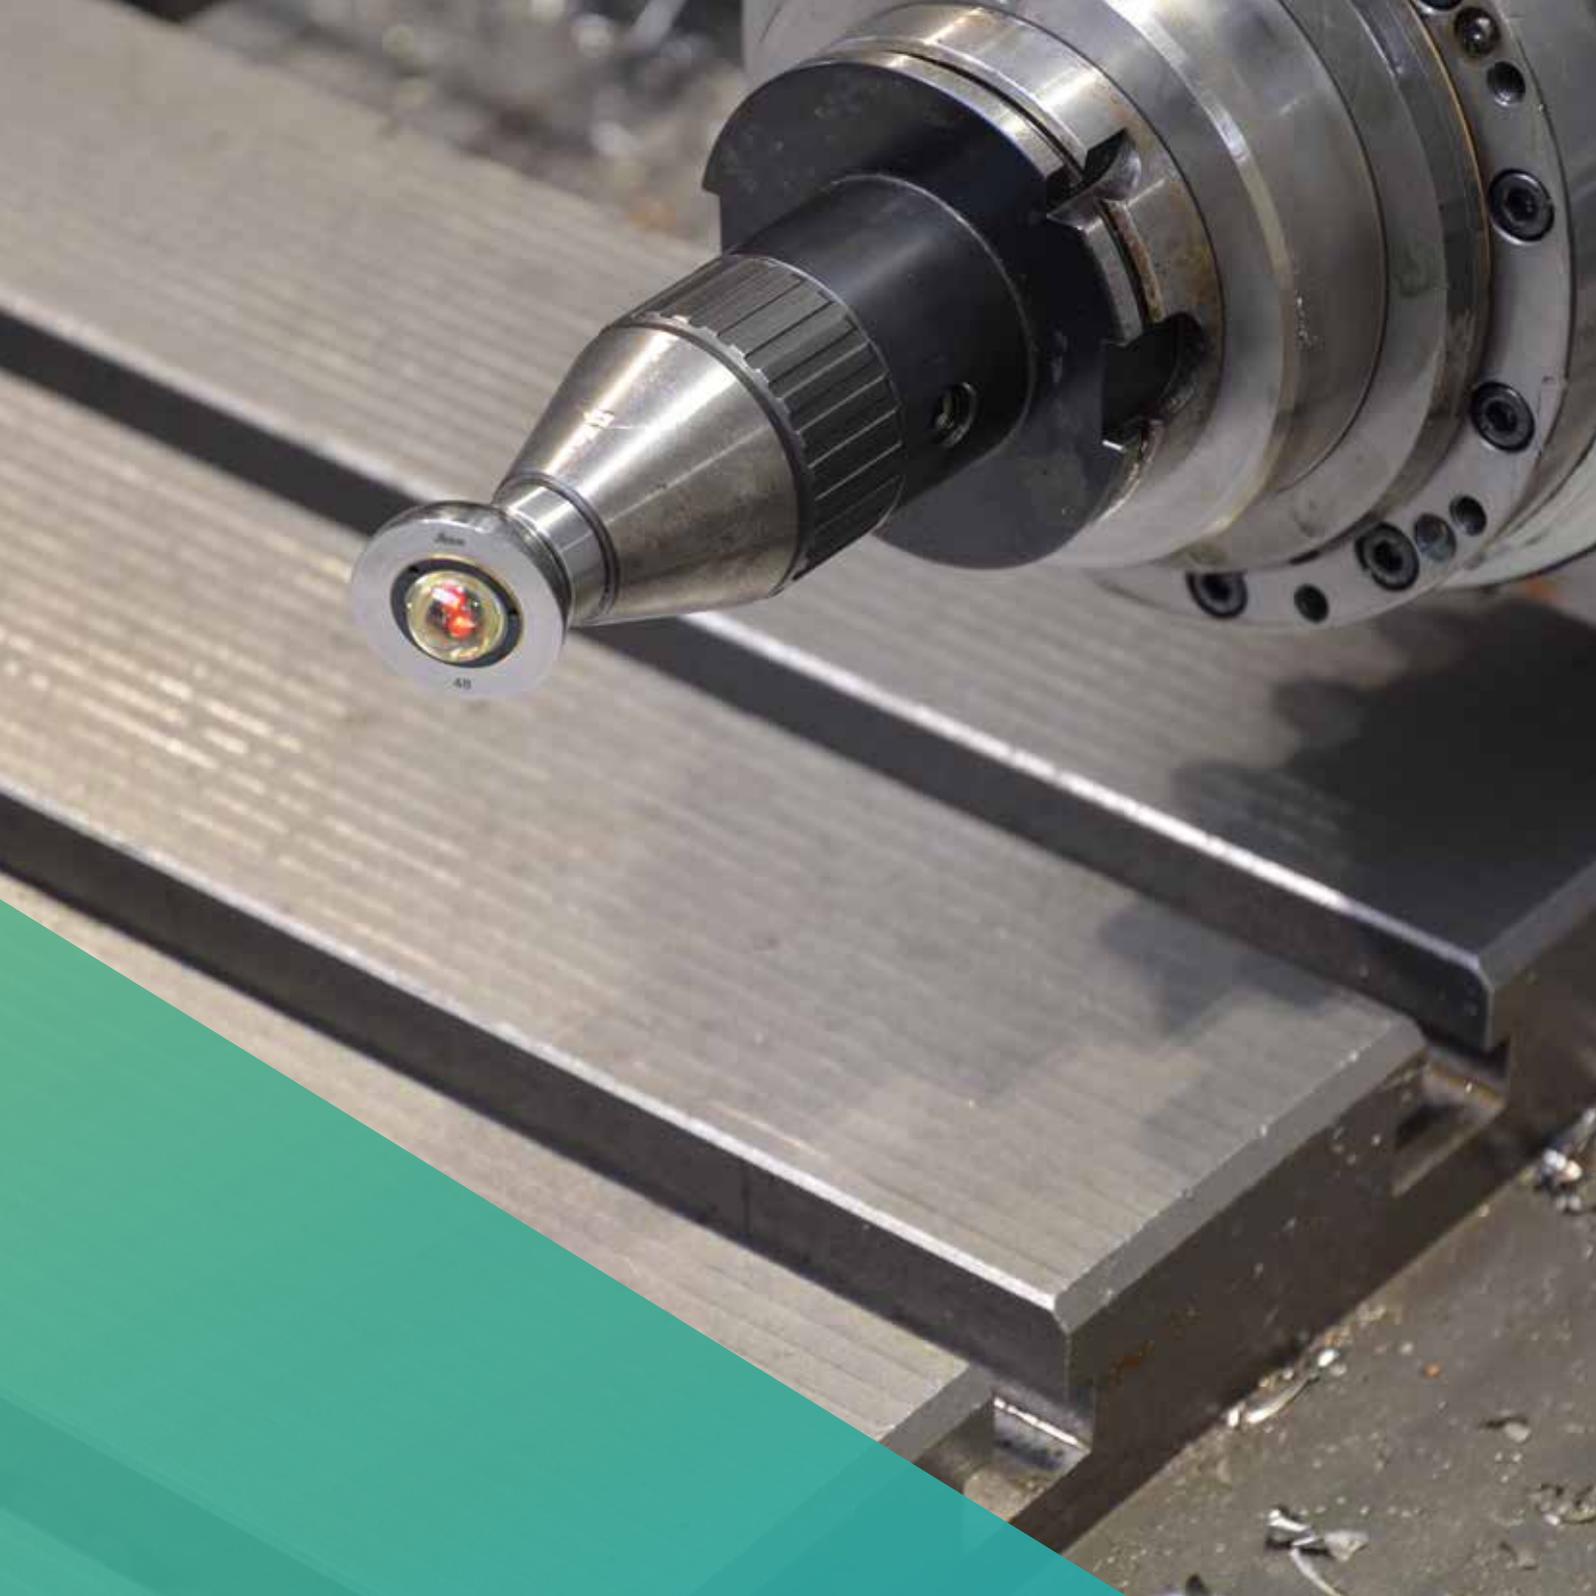

Reflectors and holders

Reflectors 52

Reflector holders 56

Reflectors



575784

Red Ring Reflector (RRR) - 1.5"

Stainless steel, surface-hardened, magnetic corner-cube reflector with removable ring, protective cover for optics and certificate. Delivered in wooden box.

Compatibility: AT403, AT930, AT960, ATS600



576311

Red Ring Reflector (RRR) - 7/8"

Stainless steel, hardened, magnetic corner-cube reflector with removable ring, protective cover for optics and certificate. Delivered in wooden box.

Compatibility: AT403, AT930, AT960, ATS600



575739

Red Ring Reflector (RRR) - 0.5"

Stainless steel, surface-hardened, magnetic, corner-cube reflector with removable ring, protective cover for optics and certificate. Delivered in wooden box.

Compatibility: AT403, AT930, AT960, ATS600



576244

Break Resistant Reflector (BRR) - 1.5"

Stainless steel, surface-hardened, magnetic reflector with collar protection cover for optics and certificate. Delivered in wooden box.

Compatibility: AT403, AT930, AT960, ATS600

Specifications and packs availability page 54.

Reflectors



576234

Tooling Ball Reflector (TBR) - 0.5"

Stainless steel, surface-hardened, magnetic, glass prism reflector with removable ring, protection cover for optics and certificate. Delivered in a wooden box.

Compatibility: AT403, AT930, AT960



575848

Reflectors for Fixed Installation (RFI) - 0.5", 5-pack.

Pack of 5 stainless steel, surface-hardened, magnetic glass prism reflectors in a wooden box.

Compatibility: AT403, AT930, AT960, ATS600



576962

Super CatEye Reflector (SCE)

Stainless steel, surface-hardened, magnetic reflector with ultra-wide acceptance angle of $\pm 75^\circ$ from vertical around a full 360-degree field of view. Includes reflector with optical protection cover, certificate and product storage box.

Compatibility: AT930, AT960



576966

Super Cateye Reference Target (SCRT)

Aluminium with samarium-cobalt magnet reflector with ultra-wide acceptance angle of $\pm 75^\circ$ from vertical around a full 360-degree field of view, embedded in a magnetic target base with magnetic shielding for transportation and storage. Mechanical adaptation of the SCRT can be established using the 6 mm M4 centre bore hole. Note: A valid Super CatEye Reflector 1.5" (576962) compensation is required for the corresponding Absolute Tracker system prior to the use of an SCRT (576966).

Compatibility: AT930, AT960

Reflectors

	Reference	Quantity	Radius	Centring of optics	Roundness (ball)	Acceptance angle	Weight
Red Ring Reflector (RRR) - 1.5"	575784	1 pc.					
	576241	2 pcs.	19.05 mm	< ±0.003 mm	≤0.003 mm	±30°	170 g
	576242	5 pcs.	±0.0025 mm				
	576243	10 pcs.					
Red Ring Reflector (RRR) - 7/8"	576311	1 pc.					
	576312	2 pcs.	11.125 mm	< ±0.003 mm	≤0.003 mm	±30°	35 g
	576313	5 pcs.	± 0.0025 mm				
	576314	10 pcs.					
Red Ring Reflector (RRR) - 0.5"	575739	1 pc.					
	576238	2 pcs.	6.35 mm	< ±0.003 mm	≤0.003 mm	±30°	6 g
	576239	5 pcs.	± 0.0025 mm				
	576240	10 pcs.					
Break Resistant Reflector (BRR) - 1.5"	576244	1 pc.	19.05 mm ± 0.0025 mm	< ± 0.010 mm	< ± 0.0015 mm	±30°	195 g
Tooling Ball Reflector (TBR) - 0.5"	576234	1 pc.					
	576235	5 pcs.	6.35mm: ± 0.004mm	< ± 0.01mm	< ± 0.003mm	w/ ring ≤ ± 22° w/out ring ≤ ± 50°	7 g
	576236	10 pcs.					
Reflectors for Fixed Installation (RFI) - 0.5"	575848	5 pcs.					
	576246	10 pcs.	6.35 mm	not applicable	not applicable	≤ ± 50°	3 g
Super CatEye Reflector (SCE)	576962	1 pc.	19.05 mm ±0.0025 mm	< ±0.005 mm	≤ 0.003 mm	±75°	106 g
Super Cateye Reference Target (SCRT)	576966	1 pc.	-	not applicable	not applicable	±75°	84 g

Reflectors



575847

Surface Reflector Kit

Kit includes:

- Surface reflector with lanyard
- Pin-Point Stylus (603182)
- 3 mm Ruby-Ball Stylus (603193)
- Edge Stylus (603188/575423)
- Manual (724251)

Compatibility: AT403, AT930, AT960, ATS600



641762

Mini prism GMP104

with L-bar, for fixed installations.

Compatibility: AT930, AT960, ATS600

Reflector holders



576142

Light Duty Magnetic Holder for 0.5" Reflectors

Small magnetic mount designed for holding small and light reflectors in place.

Compatibility: AT403, AT930, AT960, ATS600



576249

MAT22 Pass Point Target Kit

Kit includes:

- 8 x non-magnetic target base to be affixed with hot glue.
- 5x neodymium magnetic target base with magnetic shield for transportation and storage.

Delivered in case with spare cutout for CCR 1.5" reflector (not included), dimensions 250x200x70 mm, weight with targets 1.1 kg.

Compatibility: AT403, AT930, AT960, ATS600



576850
576851

Magnetic NORS Reflector Support for 1.5" Reflectors (RRR/BRR)

Magnetic support designed for holding larger reflectors in place.

1 pc.
5 pcs.

Compatibility: AT403, AT930, AT960, ATS600



576402

Reflector Mount

Can be mounted on a tripod or fix-installed at a stable location to establish nominal distances for comparison measurements. To support 0.5" and 1.5" corner-cube reflectors, magnetic reflector holders versions 576073 and 576096 are recommended.

Compatibility: AT403, AT930, AT960, ATS600



575940

Roller Alignment Kit

Kit for performing roller alignments with laser tracker and TPS systems.

The kit is delivered in a dedicated hard case and comprises:

- 2 floor base plates
- 2 centering pins with magnetic adaptor for 1.5" target
- 1 roller adaptor
- 1 magnetic adaptor for 1.5" target

Compatibility: AT930, AT960, ATS600, AT403, TDRA6000

Reflector holders



577357

Adaptor for inner diameters AID15 with adjustable magnetic base

Supports 1.5" reflectors only. For diameters 200 mm and larger. M8 thread for adaptation of CFK Extension Rod 650 mm.

Compatibility: AT930, AT960, ATS600



577339

Adaptor for inner diameters AID78 with adjustable magnetic base

Supports 7/8" reflectors only. For diameters 100 mm and larger. M8 thread for adaptation of CFK Extension Rod 650 mm.

Compatibility: AT930, AT960, ATS600



577360

CFK Extension Rod

CFK rod extension, 650 mm with M8 m/f thread for adapters AID15/78. Maximum number of recommended segments 3 x 650 mm.

Compatibility: AT930, AT960, ATS600



577358

Adaptor for outer diameters AOD15 with adjustable magnetic base.

Supports 1.5" reflectors only. Pin feet positions inter-changeable for smaller and larger object diameters.

Compatibility: AT930, AT960, ATS600



577362

3-Point Reflector Support (3PRS)

Special accessory with three-point support when probing with a 1.5 in reflector. The 3PRS reflector support will immediately stabilise the reflector position during a measurement process. Lower point RMS and maximum accuracy can be achieved compared to conventional 'hand-held' reflector measurements.

Compatibility: AT930, AT960, ATS600

Reflector holders



575847

Heavy Duty Magnetic Holder for tooling ball reflectors 0.5"

Compatibility: AT403, AT930, AT960



576102

Foundation Reflector Holder 1.5"



576104

Lanyard Set (full)

For safe handling of 1.5" and 7/8" Red-Ring Reflectors.

Offers everything required to secure the reflector either to the wrist or to many of the magnetic target holder. Two target holder collars provided (1.6" and 2.0" diameter).

Compatibility: AT403, AT930, AT960, ATS600



576105

Lanyard Set (partial)

For safe handling of 1.5" and 7/8" Red-Ring Reflectors.

Offers everything required to secure the reflector to the wrist.

Compatibility: AT403, AT930, AT960, ATS600



576131

Double Vector for TBR Shank A

Ø 0.2500"

Compatibility: AT403, AT930, AT960



576134

Tripod Reflector Holder 1.5"

Reflector holders

	Reference	Offset	Shank	Body	Material	
 <p>Reflector Holder 1.5"</p> 	577001	24 mm	ø 6 mm	ø 25.4 mm	Stainless steel	
	577002	24 mm	ø 8 mm	ø 25.4 mm		
	577003	24 mm	ø 12 mm	ø 25.4 mm		
	577101	25 mm	ø 6 mm	ø 25.4 mm		
	577102	25 mm	ø 8 mm	ø 25.4 mm		
	577103	25 mm	ø 10 mm	ø 25.4 mm		
	577104	25 mm	ø 12 mm	ø 25.4 mm		
	577120	1.0000"	ø 0.2500"	ø 1.000"	Stainless steel	
	577125	24 mm	shankless	ø 40.64 mm		
	577126	25 mm	shankless	ø 40.64 mm		
	577127	1.0000"	shankless	ø 1.60000"		
	577128	24 mm	shankless	ø 40.64 mm		Magnetic base Stainless steel
	577129	25 mm	shankless	ø 40.64 mm		
577130	1.0000"	shankless	ø 1.60000"			
 <p>Edge Reflector Holder 1.5"</p>	577135	24 mm	-	-	Stainless steel	
	577136	25 mm	-	-		
	577137	1.0000"	-	-		
 <p>Reflector Holder 0.5"</p> 	577201	10 mm	ø 5 mm	ø 12.7 mm	Stainless steel	
	577202	10 mm	ø 6 mm	ø 12.7 mm		
	577203	10 mm	ø 8 mm	ø 12.7 mm		
	577204	10 mm	ø 10 mm	ø 0.75"		
	577205	10 mm	ø 12 mm	ø 0.75"		
	577206	12 mm	ø 6 mm	ø 12.7 mm		
	577207	12 mm	ø 8 mm	ø 12.7 mm		
	577208	12 mm	ø 12 mm	ø 0.75"	Magnetic base Stainless steel	
	577209	0.3125"	ø 0.2500"	ø 0.5000"		
	577210	0.5000"	ø 0.2500"	ø 0.5000"		
	577220	10 mm	shankless	ø 12.7 mm		
	577221	12 mm	shankless	ø 12.7 mm		
577222	0.5000"	shankless	ø 0.500"			
 <p>Reflector Holder 7/8"</p>	577303	0.75"	0.25"	0.88"	Stainless steel	
	577304	0.75"	0.375"	0.88"		
	577305	0.75"	0.5"	0.88"	Stainless steel	
	577322	20 mm	6 mm	22.2 mm		
	577330	20 mm	8 mm	22.2 mm	Stainless steel	
	577334	20 mm	10 mm	22.2 mm		
	577336	20 mm	12 mm	22.2 mm	Stainless steel	
	577337	20 mm	shankless	22.2 mm		

Reflector holders



577140 **Reflector Holder Drift Nest 1.5"**
Offset 1.0000", Aluminium



577230 **Reflector Holder 0.5" Drift Nest**
Offset 0.5000", Stainless Steel



577235 **Reflector Holder 0.5" Target Corner**
Offset 0.5000", Stainless Steel



Absolute Tracker Reflector holder kit
577250 - Imperial
577251 - Metric
Compatibility: AT403, AT930, AT960, ATS600



577255 **Total Station Sphere**
1.5" sphere for 3D manual sighting applications

Reflector holders



577259

1.5" to 0.5" Adaptor

To be able to use a 0.5" reflector in a 1.5" nest.

Compatibility: AT403, AT930, AT960



577310

Reflector Holder 7/8"

Offset 0.7500", Shankless, Body 0.88", Magnetic Base, Stainless Steel



577311

Tripod Reflector Holder 7/8"



577312

Drift Nest 7/8", Offset 0.700", Aluminium



577359

1.5" to 7/8" adaptor

To be able to use a 7/8" reflector in a 1.5" nest

Edge Reflector Holder 7/8"

Stainless Steel

577302

Offset 0.7500"

577321

Offset 20 mm



Cables and batteries

Cables and batteries



576875

Battery External Li-ion 37V/8.1Ah MPB25

External chargeable li-ion battery for AT930/960 or ATS600 Absolute Tracker models. Connects to AT/ATS Controller. Built-in charger technology – MPS21 Power Supply Unit (576873) required for charging, to be ordered separately (included as standard as part of the standard laser tracker configuration). MSI26 Universal ATC Stand Fixture (576895), to be ordered separately, required to mount the battery on a stand/tripod.

Battery specifications: 37 V / 8.1 Ah / 299 Wh
Typical operation time: 6-8 hrs

Compatibility: AT930, AT960, ATS600



576965

Battery External Li-ion 36V/2.5Ah MPB100

External chargeable li-ion battery for AT930/960 or ATS600 Absolute Tracker models. Connects to AT/ATS Controller. Built-in charger technology – MPS21 Power Supply Unit (576873) required for charging, to be ordered separately (included as standard as part of the standard laser tracker configuration). MSI26 Universal ATC Stand Fixture (576895), to be ordered separately, required to mount the battery on a stand/tripod.

Battery specifications: 36 V / 2.5 Ah / 90 Wh
Typical operation time: 2-3 hrs

Compatibility: AT930, AT960, ATS600



576876

Battery Cable MCA24 - 0.75 m

The battery cable supports a multi-case.

- Connects MPB25/MPB100 battery to the AT Controller/ATS Controller of the AT930/960/ATS600 Absolute Tracker
- Connects 2 MPB25/MPB100 batteries in a daisy chain charging setup
- Connects MPB25/100 battery to the AT Connect Box CB21
- Connects the AT Controller to the AT Connect Box CB21

Compatibility: AT930, AT960, ATS600

Cables and batteries



576874

Battery Hard Case MTC29

Hard battery case that can hold:

- 2x MPB25 Battery External Li-Ion 37V/8.1Ah (576875)
- or
- 2x MPB100 Battery external Li-Ion 36V/2.5Ah (576965)
- 1x MPS21 Power Supply Unit (576873)
- 2x MCA24 Battery Cable - 0.75 m (576876)
- 2x MSI26 Universal Stand Fixture (576895)

Empty hard case only. Accessories to be ordered separately.

Compatibility: AT930, AT960, ATS600



6009769

Battery Set MPB25

Portable laser tracker power and charging package.

Set includes:

- 2x MPB25 Battery External Li-Ion 37V/8.1Ah (576875)
- Battery Specifications: 37V / 8.1Ah / 299.7Wh
- 1x MPS21 Power Supply Unit (576873)
- 2x MCA24 Battery Cable - 0.75 m (576876)
- 2x MSI26 Universal Stand Fixture (576895)
- 1x MTC29 Battery Hard Case (576874)

Compatibility: AT930, AT960, ATS600



6016957

Battery Set MPB100

Portable laser tracker power and charging package.

Set includes:

- 2x MPB100 Battery External Li-Ion 36V/2.5Ah (576965)
- Battery Specifications: 36 V / 2.5 Ah / 90 Wh
- 1x MPS21 Power Supply Unit (576873)
- 2x MCA24 Battery Cable 0.75 m (576876)
- 2x MSI26 Universal Stand Fixture (576895)
- 1x MTC29 Battery Hard Case (576874)

Compatibility: AT930, AT960, ATS600

Cables and batteries



575983 **T-Probe Replacement Battery**

Compatibility: AT960



734195 **T-Probe Battery Charger**

Compatibility: AT960



799185 **Charger Pro 3000 GKL311**

Basic charger for one Li-ion battery. Suitable for GEB211, GEB212, GEB221, GEB222, GEB241, GEB242, GEB331 and GEB361. AC adaptor included.

Compatibility: TM6100A, AT403



799187 **Charger Pro 5000 GKL341**

Professional charger to charge up to 4x Li-Ion batteries GEB241 and GEB242, AC adaptor included.

Compatibility: TM6100A, AT403



793975 **Lithium-Ion Battery GEB242**

Rechargeable 14.8V/5.8Ah battery.

Compatibility: TM6100A, AT403



576873 **Power Supply Unit MPS21**

Power supply for AT930/960 or ATS600 laser trackers. Connects to AT Controller (576871) or ATS Controller (576981). Input 80-264 VAC to output 48 VDC. For indoor use only.

The Power Supply Unit is compatible with

- AT Controller (576871)
- MPB25 Battery external Li-Ion 37V/8.1Ah (576875)
- LASC-211 Controller unit (576909)
- AT Connect Box CB21 (577377)

The MPS21 is delivered with a country based power cord.

Compatibility: AT930, AT960, ATS600

Cables and batteries



576886
576887

Sensor Cable

Cable for connecting AT Controller to AT930/960 or ATS Controller to ATS600.

MCS12 - 10 m
MCS13 - 30 m

Compatibility: AT930, AT960, ATS600



576888
576889
576890

External Temperature Sensor

Accessory for AT930/960 or ATS600 for measuring external air and/or object temperatures. It connects to the AT Controller or ATS Controller. The temperature sensor is configured with a 2, 10 or 30 m cable and has a square 8 x 8 x 42 mm tip with a borehole \varnothing 4.2 mm to fix it to the object.

Temperature range: -20 to +80°C

Temperature accuracy: \pm 0.3°C

MCA18 - 2 m
MCA19 - 10 m
MCA20 - 30 m

Compatibility: AT930, AT960, ATS600



576885

Sensor Cable MCS11 - 1.5 m

Connects AT Controller to AT930/960 or ATS Controller to ATS600.

Compatibility: AT930, AT960, ATS600



577361

Temperature Probe Holder

Temperature Probe Holder with magnetic base for object temperature probes of AT40x, AT930, AT960 and ATS600 sensor types.

Cables and batteries



575899

LAN-Cable RJ-45 Cat6 MCA134 - 5 m

Connects tracker system and application computer.

Compatibility: AT403, AT930, AT960, ATS600



Elbow Sensor Cable

Connects the AT930/960 to the AT Controller or the ATS600 to the ATS Controller. Tracker-side has a 90-degree elbow plug, which enables tracker setup at a minimum height above the mounting surface (e.g. on a machine bed).

576956

MCS96 - 1.5 m

576957

MCS96 - 10 m

576958

MCS96 - 30 m

Compatibility: AT930, AT960, ATS600



Scanner Sensor Cable

Connects LAS (576908) or LAS-XL (576943) to LASC-211 Scanner Controller (576909).

576911

MCA63 - 10 m

576912

MCA62 - 20 m

576945

MCA62 - 30 m

Compatibility: AT960



576903

Trigger/Probe Cable MCA47 - 2 m

Connects AT Controller to AT Connect Box CB21 (577377) or to T-Scan 5 (576187) and LASC-211 Scanner Controller (576909) for the LAS/LAS-XL.

Compatibility: AT960

Cables and batteries



577379
577380

Positioner Sensor Cable

Cable for connecting the Absolute Positioner AP21 (577368) with the AT Connect Box CB21 (577377).

MCA110 - 10 m
MCA111 - 20 m

Compatibility: AT960



576876

Battery Cable MCA24 - 0.75 m

The Battery Cable supports a multi-case.

- Connects MPB25/MPB100 battery to the AT Controller/ATS Controller of the AT930/960/ATS600 Absolute Tracker
- Connects 2 MPB25/MPB100 batteries in a daisy chain charging setup
- Connects MPB25/100 battery to the AT Connect Box CB21
- Connects the AT Controller to the AT Connect Box CB21

Compatibility: AT930, AT960, ATS600



855240
576903
873553

Trigger/Probe Cable MCA114

Connects AT Controller to AT Connect Box CB21 (577377) or to T-Scan 5 (576187) and LASC-211 Scanner Controller (576909) for the LAS/LAS-XL.

MCA114 - 0.75 m
MCA47 - 2 m
MCA113 - 15 m

Compatibility: AT960



575899

LAN-cable RJ-45 Cat6

Connects AT Controller to AT Connect Box CB21 (577377).

MCA115 - 0.75 m
MCA134 - 5 m

Compatibility: AT960



577396

Autom. Signal Splitter GigE/Probe MCA127

Cable junction for separating GigE and probe data. The splitter is equipped with M12 x-coded female sockets. The sockets are colour coded green/black for GigE/Probe cables. The splitter plugs into the scanner socket of the AT Connect Box CB21 (577377).

Compatibility: AT960

Cables and batteries



Cable T-Probe

Reserve or replacement cable for the T-Probe.

- 575972 10 m
- 575973 20 m
- 576185 50 m

Compatibility: AT960

Cables and batteries



External Temperature Sensor

External NTC temperature sensor that connects to the AT Controller 400 or the standalone AT MeteoStation. Tip is square shaped, 8 x 8 x 40 mm with a borehole $d=4.2$ mm for fixing it to the object. It can be used as an air-and/or object-sensor.

Parameters:

Temperature range: -20°C to $+50^{\circ}\text{C}$

Temperature accuracy: $\pm 0.2^{\circ}\text{C}$

576350

MCA15 - 2 m

576351

MCA14 - 10m

Compatibility: AT403



576376

Sensor Cable MCS17 - 1.8 m

Compatible with Absolute Tracker AT40x to AT Controller 400.

Compatibility: AT403



576356

MCS82 - 5 m

576357

MCS83 - 10 m

Compatibility: AT403



576513

USB-to-micro-USB cable for B-Probe

For firmware-upgrade via PC.



D = 90.005 mm

Thermal expansion coefficient: $23.4 \times 10^{-6} / K$

Reference temperature: 20°C

SN:001

$23.4 \times 10^{-6} / K$

20°C

Compensations and field checks

Compensations and field checks



576893

Invar Reference Bar MAC55, 1000 mm

Low thermal expansion length reference bar provides a stable length for use during laser tracker or scanner jobs. Can be directly placed on the floor/table (3-point feet). Includes supports 0.5", 7/8" and 1.5" reflectors, certificate, case with contour-cut foam.

- Bar length uncertainty: +/-0.007 mm
- Weight: 1.45 kg (3.86 kg with case)

Compatibility: AT403, AT930, AT960



576894

6DoF Compensation Kit MAC23

For on-site compensations of the integrated 3D and 6DoF Absolute Tracker system components. Consists of tripod interface (5/8" thread), compensation frame and light-duty magnetic holder for tooling ball reflectors 0.5". For the process a Red-Ring Reflector 0.5" (575739) and a T-Probe cable is required (20 m, 575973) – to be ordered separately.

Compatibility: AT403, AT930, AT960



576913

MAC64 Reference Sphere MAC64 - d=30 mm

Reference artefact designed for field checks and alignments of LAS laser scanner. Includes certificate.

- Diameter: 30 mm
- Material: aluminum
- Roundness: 0.030 mm
- Weight: 1200 g

Compatibility: AT960



Reference Sphere Support MAC74

Support designed to hold the MAC64 Reference Sphere d=30 mm (576913). Has a central UNC 5/8"-11 thread compatible with MST36 (576901), AT21 (575483), AT28 (575484) tripods, as well as 2 universal 7 mm boreholes.

Compatibility: AT960

Compensations and field checks



576947

Reference Sphere MAC87 - d=90 mm

Reference artefact designed for field checks and alignments of scanning systems.

Consists of:

- Aluminium reference sphere, with support
- Diameter: 90 mm
- Sphericity/roundness: 0.030 mm
- Weight: 1200 g
- Certificate

The included Reference Sphere Support has a central UNC 5/8"-11 thread, which is compatible with our stands (MST36, AT21, AT28), as well as 2 universal 7 mm bore holes.

Compatibility: AT960



6010685

Reference Sphere Set MAC64 - d=30 mm

Set consists of:

- MAC64 Reference Sphere - d=30 mm (576913)
- MAC77 Reference Sphere Support (576923)

Note: The Reference Sphere Support has a central UNC 5/8"-11 thread, which is compatible with our stands (MST36, AT21, AT28), as well as 2 universal 7 mm bore holes.

Compatibility: AT960



576190

Reference Sphere MAC41 - d=50 mm

Reference sphere with magnetic base designed for field checks and alignments of T-Scan 5 laser scanners.

Compatibility: AT960

575980

T-Probe Compensation Kit

For on-site compensation of Leica T-Probe. Comes with T-Probe reference frame, wedge tool, tripod screw and light duty magnetic holder for 0.5" Red Ring Reflectors. Requires additional 0.5" Red Ring Reflector (corner cube) for compensation process. The T-Probe compensation kit fits into the T-Cam compensation kit shipping container.

Compatibility: AT960

Compensations and field checks



576899

T-Probe Stylus Compensation Tool MAC34

The MAC34 is used for on-site T-Probe Stylus compensations of various styli configurations. The MAC34 can be extended for Shank-Stylus with the T-Probe Stylus Shank Compensation Tool (576247).

Compatibility: AT960



576900

Magnetic Device MAC35 for MAC34

For use with MAC34 T-Probe Stylus Compensation Tool (576899). Holds to any magnetic surface. Magnetic force can be switched on and off. The MAC34 T-Probe Stylus Compensation Tool must be ordered separately.

Compatibility: AT960



576247

T-Probe Stylus Shank Compensation Tool MAC57

Accessory for compensating cylindrical probe styli. Must be mounted on the MAC34 T-Probe Stylus Compensation Tool (576899), which must be ordered separately.

Compatibility: AT960



577401

Reference Sphere MAC133 - d=25.4 mm

The Reference Sphere is designed for field checks and alignments of scanning systems.

- Diameter: 25.4 mm
- Material: Tungsten carbide with matte finish
- Certificate and base plate included
- Base plate has a central UNC 5/8"-11 thread, which is compatible with tripods (576901 MST36, 575483 AT21, 575484 AT28). In addition there are 2 universal 7 mm bore holes.

Note: The sphere is already included in the AS1 Kit

Compatibility: AT960



576512

B-Probe Stylus Compensation Tool

Compensations and field checks



576898

Optical Cleaning Kit MAT33

Does away with solvents, harsh cleaning products and messy lens tissues that can leave ugly and problematic smears that ruin measurement quality. Suitable for cleaning AT930/960 or ATS600 sensor optics as well as reflectors.

The kit includes:

- 1x Dust ex blower (167119)
- 2x Cleaning Tissues (771349)
- 8x Cleaning Swabs, large (758346)
- 5x Cotton Swabs, small (724954)
- 1x Cleaning Brush (822420)
- 1x Cleaning Kit Bag (821236)

Compatibility: AT403, AT930, AT960, ATS600



576401

Mirror Tool

Used to measure distances between 2 points with a laser tracker using only the interferometer. This basic set includes holders for 0.5" and 1.5" reflectors (2 units each, version 576073 and 576096). This tool can also be used to generate nominal distance values for the planned VDI/VDE standard.

Compatibility: AT403, AT930, AT960, ATS600

Other accessories

Measurement cart **80**

Transport case and container **81**

Further accessories **84**

Measurement cart



576950

Absolute Tracker Measurement Cart MMC91

Cart is compatible with AT930/960 or ATS600. Contains a flexible shelf system for installation controllers, UPS and computers. Controller and computer compartment is temperature regulated (built-in fan). Cart can be used like a regular measuring cart or reconfigured to a shuttle cart. Drawers equipped with preconfigured foam inlays for storing AT930/960 or ATS600, scanners, reflectors and reflector supports, as well as Leica T-Probe, styli and extensions. The main cart desktop can be extended with a foldable side-table.

The cart consists of:

- Measurement Cart with shelf compartment, drawers and lockable wheels
- 2x belt with snap hook and quick-connect buckle to fix tracker and/or stands on shuttle rail
- Power strip (US or EU version)
- 5x drawer inlays
- Velcro straps for controller and computer fixation
- USB-fan with USB extension cable
- Mechanical interface for forklift manipulations
- Cable Drum

Cart compartment and drawers are lockable with a key system (2 keys included). Dimensions L=1.20 m, W=0.70 m, H=1.10 m.

Compatibility: AT930, AT960, ATS600



576942

Metrology Cart Modification Kit MMC31

Kit for modifying a standard metrology cart to fit various laser tracker and laser scanner systems.

Kit includes:

- Installation manual
- Drawer with foam inlay for scanner devices
- Scanner controller shelf with Velcro tapes for controllers and power supplies
- Foam inlay for AT930/960 and ATS600 sensors
- Set of installation material

The modification kit is compatible with the MMC31 Measurement Metrology Cart (576896) only.



576953

Dust Cover MAM94

Cover compatible with the following measurement carts: MMC91 (576950) and MMC31 (576896).

Transport case and container



576891

AT930/AT960/ATS600 Transport Container MTC51

Standard transportation case to fit various laser tracker systems and accessories.

The transport container can hold:

- Absolute Tracker AT930/AT960 (576861-576865) or ATS600 (576971)
- AT Controller (576871) or ATS Controller (576981)
- MPS21 Power Supply Unit (576873)
- MCS11 Sensor Cable 1.5 m (576885)
- AT Quick Release Mount incl. Mandrel (576338)
- MCA18 External Temperature Sensor 2 m (576888)
- Red-Ring Reflector (RRR) - 1.5" (575784)
- MSI26 Universal Stand Fixture (576895)
- MAT33 Optical Cleaning Kit (576898)
- Protective Sensor Cover

Empty transport container only. Accessories to be ordered separately.

Dimensions: L=62.5 cm, W=50 cm, H=36.6 cm (L=24.60", W=19.70", H=14.40")

Compatibility: AT930, AT960, ATS600



576922

LAS Trolley Case MTC73

The trolley case can hold:

- LAS laser scanner (576908)
- LASC-211 Scanner Controller (576909)
- MCA62 Scanner Sensor Cable - 10 m (576911)
- MPS21 Power Supply Unit (576873)
- LAN-cable RJ-45 - 5 m (575899)
- MCA47 T-Scan Trigger/Probe Cable - 2 m (576903)
- MAC64 Reference Sphere - d=30 mm (576913)
- MAC74 Reference Sphere Support (576923)
- MAP65 Horizontal Scanner Holder (576914)
- MAV67 Scanner Controller Feet Set (576915)
- T-Probe III (576186)
- T-Probe Styli Kit (576231)
- MPB25 Battery external Li-Ion 37V/8.1Ah (576875)

Empty trolley case only. Accessories to be ordered separately.

Dimensions: L=62.5 cm, W=50 cm, H=36.6 cm (L=24.60", W= 19.70", H=14.40")

Compatibility: AT960

Transport case and container



576910

LAS Transport Case MTC61

The transport case can hold:

- LAS laser scanner (576908)
- LASC-211 Scanner Controller (576909)
- MCA62 Scanner Sensor Cable - 10 m (576911)
- Power Supply Unit (576873)
- LAN-cable RJ-45 - 5 m (575899)
- MCA47 T-Scan Trigger/Probe Cable - 2 m (576903)
- MAC64 Reference Sphere - d=30 mm (576913)
- MAP65 Horizontal Scanner Holder (576914)
- MAV67 Scanner Controller Feet Set (576915)

Empty transport container only. Accessories to be ordered separately.

Dimensions: L=49.6 cm, W=33.0 cm, H=25.6 cm (L=19.53", W= 12.99", H=10.08")

Compatibility: AT960



576949

LAS/LAS-XL Trolley Case MTC90

The trolley case can hold:

- LAS-XL laser scanner (576943)
- LAS-20-8 laser scanner (576908)
- LASC-211 Scanner Controller (576909)
- MCA63 Scanner Sensor Cable - 20 m (576912)
- MPS21 Power Supply Unit (576873)
- LAN-cable RJ-45 - 5 m (575899)
- MCA47 T-Scan Trigger/Probe Cable - 2 m (576903)
- 2x MAP65 Horizontal Holder (576914)
- MAC64 Reference Sphere Set - d=30 mm (6010685)
- MAC87 Reference Sphere - d=90 mm (576947)
- MPB25 Battery External Li-Ion - 37V/8.1A (576875)
- Leica T-Probe III (576186)
- Reflector case

Empty trolley case only. Accessories to be ordered separately.

Dimensions: L=62.5 cm, W=50 cm, H=36.6 cm (L=24.60", W= 19.70", H=14.40")

Compatibility: AT960

Transport case and container



576944

LAS-XL Trolley Case MTC85

The trolley case can hold:

- LAS-XL laser scanner (576943)
- LASC-211 Scanner Controller (576909)
- MCA63 Scanner Sensor Cable - 20 m (576912)
- MPS21 Power Supply Unit (576873)
- LAN-cable RJ-45 - 5 m (575899)
- MCA47 T-Scan Trigger/Probe Cable - 2 m (576903)
- MAC87 Reference Sphere - d=90 mm (576947)
- MAP65 Horizontal Scanner Holder (576914)

Empty trolley case only. Accessories to be ordered separately.

Dimensions: L=49.6 cm, W=33.0 cm, H=25.6 cm (L=19.53", W= 12.99", H=10.08")

Compatibility: AT960



577387

Absolute Scanner Trolley Case MTC118

The trolley case can hold:

- Absolute Scanner AS1 (577367), incl. Certificate
- Absolute Positioner AP21 (577369)
- MAP102 Grip (577370)
- AT Connect Box CB21 (577377)
- MCA110 Positioner Sensor Cable - 10 m (577379)
- MCA24 Battery Cable - 0.75 m (576876)
- MCA114 Trigger/Probe Cable - 0.75 m (855240)
- MCA115 LAN-cable RJ-45 Cat6 - 0.75 m (577384)
- MAC133 Reference Sphere - d=25.4 mm (577401)
- MAP116 Positioner Horizontal Holder (577385)
- MSI26 Universal ATC Stand Fixture (576895)
- MAP117 Positioner Clip Support (577386)

Empty trolley case only. Accessories to be ordered separately.

Dimensions: L=53.8 cm, W=40.6 cm, H=26.9 cm (L=21.20", W= 16.00", H=10.60")

Compatibility: AT960, Absolute Scanner AS1



576520

AT40x Trolley Case MTC56

Trolley case/shipping container for AT40x systems (not included) and optional accessories (not included). Suitable for AT40x systems with GKL311 Charger Pro 3000 (799185) and MSI26 Universal Stand Adaptor (576895).

Compatibility: AT403



833516

Backpack for Container GVP716

Compatibility: AT403

Further accessories



576921

Sensor Aperture MAV72

Redirects air movements around sensor optics to improve measurement data quality.

Compatibility: AT960



575757

Wireless RF Control

Wireless Radio Frequency Remote Control (2.4GHz), 4 custom programmable buttons, up to 45 m/150ft Range, USB interface, compatible with Windows XP or higher (32bit/64bit).

Compatibility: AT403, AT930, AT960, ATS600



575965

Wireless IR Control

4 custom programmable buttons, up to 20 m/65ft range, USB interface, compatible with Windows XP or higher (32bit/64bit).

Compatibility: AT403, AT930, AT960, ATS600



576379

AT Remote Control 400

Wireless infrared control unit compatible with Absolute Tracker AT40x systems.

Content: Remote control unit 2x AAA-batteries.

Compatibility: AT403

Further accessories



874298

Surface Sample Tool

Demonstrating and comparing scanning sensors on difficult materials is now possible. Use the Surface Sample Tool to demonstrate the capability of our scanning devices. The Surface Sample Tool consist of 12 different surface sample materials: metal coated Aramide fibre with clear coat finish, black felt textile, white car paint 2K/clear coat, black car paint 2K/clear coat, red car paint 2K/clear coat, yellow car paint 2K/clear coat, carbon fibre flat finish (grinded), green car paint 2K/clear coat, carbon fibre semi-gloss finish (prepreg), blue car paint 2K/clear coat, carbon fibre gloss finish (clear coated) and chrome plated.

Dimensions: 290 x 150 x 13 mm, weight: 620 g



576981

Leica ATS Controller

Controller for the ATS600 scanning laser tracker.

MPS21 Power Supply Unit (576873) and MSI26 Universal ATC Stand Fixture (576895) must be ordered separately.

Compatibility: ATS600



576360

AT Controller 400

Compatibility: AT403



576871

AT Controller

The AT Controller is compatible with Leica Absolute Tracker AT930/AT960 series. The 576873 MPS21 Power Supply Unit and 576895 MSI26, Universal ATC Stand Fixture has to be ordered separately.



Industrial theodolites

Industrial theodolites **88**

Accessories for industrial theodolites **89**

Industrial theodolites



576372

TM6100A Motorized Industrial Theodolite

With pan focal telescope, build-in autocollimation eyepiece and GUS29 internal target. Including user manual, upright container and Calibration Certificate "Gold".



576528

Optional Second Keyboard GTS39

Additional keyboard with touchscreen and colour display. Fits to telescope position 2 (factory fitted). Must be configured with a new instrument and cannot be ordered separately.



308838

Eyepiece FOK53

Viewing eyepiece with 44x magnification at 10 m. Optically adjusted and fitted in factory (only to be ordered with new instrument).

Accessories for industrial theodolites TM6100A



799658

Screen protector SPF03

Reserve or replacement touchscreen protection foil for protection against scratches and dust.



376236

Steep Sight Eyepiece GOK6

Viewing eyepiece with joint allowing variable sighting angle. Includes counterweight compatible with the TDRA6000 (the M5100A/TM6100A requires a different counterweight (712504) that must be ordered separately).



712504

Counterweight (GOK6)

Required counterweight for using GOK6 Steep Sight Eyepiece.



575725

Plug-in Lamp AL51

392368

Autocollimation Mirror GAS1

Mirror for autocollimation with diameter of 50 millimetres, delivered in a case.



723231

Counterweight (DL2/3)

Required counterweight for using DL2/3 diode laser with TM5100A/TM6100A.

Accessories for industrial theodolites TM6100A



576352 **Tribrach PRO without Optical Plummet GDF321-I - light grey**

Compatibility: TM6100A, AT403



576353 **Tribrach PRO with Optical Plummet GDF322-I - light grey**

Compatibility: TM6100A, AT403



417677 **Measuring slide (single direction) GMT5**

With maximum working range 40 mm; least count 0.01 mm.

Compatibility: TM6100A, AT403



417678 **Adaptor set GAD12**

For mounting GMT5 translation stage onto any Leica tribrach; includes tribrach to mount instrument; typical adapter set for theodolites and total stations.

Compatibility: TM6100A, AT403



417679 **Adaptor set GAD13**

For mounting GMT5 translation stage onto 5/8" thread; includes adaptor plate with 5/8" thread to mount instruments; typical adaptor set for levels.

Compatibility: TM6100A, AT403

Accessories for industrial theodolites TM6100A



575483

Aluminium Tripod AT21

Robust and light-weight tripod with 5/8" thread. Suitable for industrial theodolites and AT403, as well as laser tracker field check equipment for ATS600 and AT9x0 models.

Instrument height: 1.4 - 2.1 m, weight: 11 kg



575484

Aluminium Tripod AT28

Robust and light-weight tripod with 5/8" thread and adjustable centre column. Suitable for industrial theodolites and AT403, as well as laser tracker field check equipment for ATS600 and AT9x0 models.

Instrument height: 1.4 - 2.8 m, weight: 12 kg



575498

Tripod bracket

in order to attach accessories (battery, DL2 intensity regulator, Radio Modem) to AT21/28 tripods.



296632

Telescopic Tripod with Accessories GST20

Robust, well-established tripod for general use. Suitable for levels, lasers, Total Stations and GPS. Extendible 180 cm (5.9ft), weight 6.4 kg (14.1lb)

Compatibility: TM6100A, AT403



332200

Tripod Base GST4

For setting up GST tripods on smooth surfaces.

Compatibility: TM6100A, AT403

Accessories for industrial theodolites TM6100A



793975

Lithium-Ion Battery GEB242

Rechargeable 14.8V/5.8Ah battery.

Compatibility: TM6100A, AT403



774437

Charger GEV242 for GEB371 external battery

for indoor use only, input 100V-240VAC 50-60HZ, output 24VDC, cable with 5-pin Lemo to connect to battery.



799185

Charger Pro 3000 GKL311

Basic charger for one Li-ion battery. Suitable for GEB211, GEB212, GEB221, GEB222, GEB241, GEB242, GEB331 and GEB361. AC adaptor included.

Compatibility: TM6100A, AT403



799187

Charger Pro 5000 GKL341

Professional charger to charge up to 4x Li-ion batteries GEB241 and GEB242, AC adaptor included.

Compatibility: TM6100A, AT403



905305

External Battery Li-Ion GEB373

13V, 289Wh. Quick Guide and User Manual, multilingual included

Accessories for industrial theodolites TM6100A



575427

T-LINK Interface

Power supply unit for TPS, for indoor use only. Input 94-265VAC to output 12VDC. Connects up to 4 TPS6000 instruments or up to 8 TPS5000 instruments.



576521

Power cable GEV286-I 20 m

Connects TPS6000 instrument with power supply T-Link/GEV270 or external battery GEB371.



800497

Cable spool

for 20 m/40 m cables (without cable)



576388

USB adapter RS232 serial

574834

Cable to connect DL2/3 and intensity regulator.

527497

Data cable GEV86 - 20 m

Connects DL2/3 intensity regulator or TPS5000 instrument to external power supply T-LINK/GEV270 or external battery GEB371.



576387

Power Cable GEV64-I - 1.2 m

connects TM6100A with DL2/3 intensity regulator.

Accessories for industrial theodolites TM6100A



6013373

TPS6000 Interface Set

Consists of: GDF321-I Industrial Tribrach w/o opt. Plummet GKL341 Professional Charger 5000, MCF256 Compact Flash Card, GEV269 Data Transfer Cable Lemo1 / USB



806093

Serial data transfer cable GEV267 - 2.0 m

converter cable USB to serial (Lemo to USB connector), connects TPS02/06+/09+/11/12/15/DNA/TPS5000 to PC. PC driver included on CD.



807696

Power supply GEV270 for TPS5000/TPS6000

for indoor use only, Input 100 - 240V AC to output 13.8V DC, with connection for power cables.
Requires GEV219, GEV220 or GEV286-I power cable to connect TPS6000 instrument.



758469

Power cable GEV219 - 1.8 m

Connects TPS6000 instrument with power supply GEV270 or external battery GEB371.



759257

Y-Cable GEV220 - 2.0 m

Connect TPS6000 instrument to PC (9-pin RS232 serial) and power supply GEV270 or external battery GEB371.



733282

Data transfer cable GEV162 - 2.8 m

Connects TPS6000 instrument to PC for data transfer, firmware upload etc., Lemo 1 to 9-pin RS232 serial connector.



806095

Serial data transfer cable GEV269 - 2.0 m

Connects TPS6000 instrument to PC for data transfer, firmware upload etc., converter cable USB to serial (Lemo 1 to USB A connector), PC driver included on CD.



758513

Adapter cable TPS6000

(Lemo 0 - Lemo 1)

Accessories for industrial theodolites TM6100A



707525 **Lemo Canon converter GK1 30°, for PC**



Compact Flash card

733257 MCF256 - 256 MB
745995 MCF1000 - 1 GB



767895 **USB card reader MCR7**
for SD- and CF-cards



733258 **Compact Flash PC Card adapter MCFAD1**



409678 **Data cable GEV52 1.8 m**
Connects DL2/3 intensity regulator to external power supply T-LINK/GEV270 or external battery GEB371.



571549 **Targets on self-adhesive-foils**
Black/white, \varnothing 23 mm with concentric circles, 48 pieces on one sheet.



574681 **Target for orientation measurements, magnetic.**




800742 **Scale bar - 0.9 m**
Carbon fibre, incl. Producer Certificate, in carrying case.

Driving the tools of high-end inspection

Hexagon is the largest software developer in the metrology industry and offers a wide range of individually customisable software packages. Hardware solutions from Hexagon support this with a foundation of cross-platform compatibility, designed for perfect functionality with both the many advanced platforms developed in-house and the best third-party programs on the market.

SpatialAnalyzer	Inspire	PC-DMIS
VISI Reverse	REcreate	TRAC-CHECK
PolyWorks®	Metrolog X4	
DM Works	Silma / X4-iRobot	RoboDyn

-  Hexagon
-  Third-party

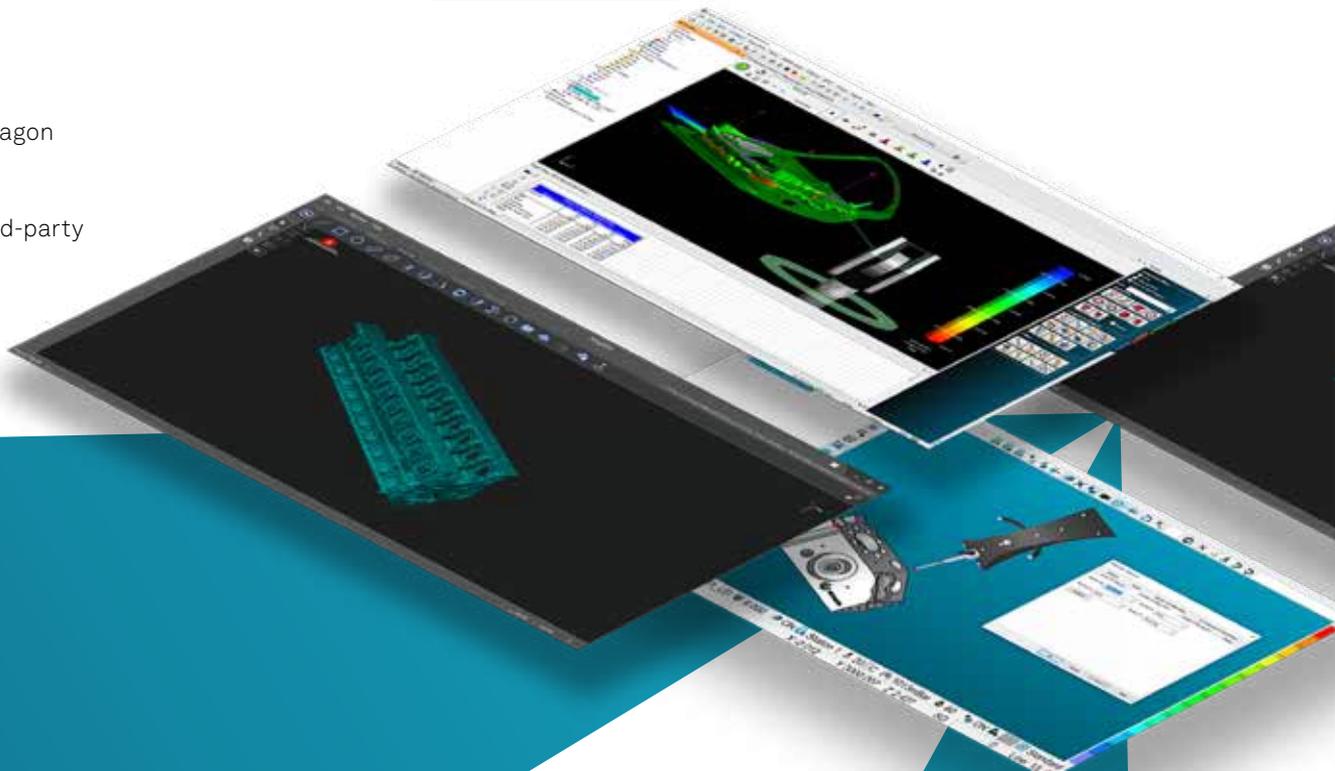

Application Software

Hexagon software 98

Third-party software 104

Inspire




User-friendly measurement software for portable probing and scanning

Inspire is the next generation inspection software for all portable probing and scanning devices. Inspire is a new software package that makes measurement simple and the complex possible. With one simple interface, Inspire works with laser tracker for probing and scanning applications. Intuitive and easy to use, Inspire software is a comprehensive solution that makes measurement simple, saves time, and ultimately improves productivity.

Inspire capabilities

- Measure
- Align
- Assemble/Build
- Analyse
- Report
- Scan and Probe
- Mesh
- Instrument networking
- Advanced Scripting
- CAD Import

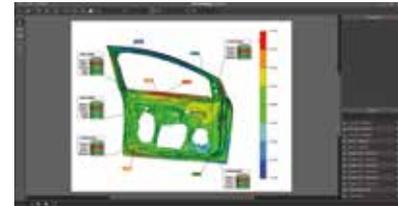

Single Seat Licence includes all hardware interfaces and supports IGES, STEP, STL, CATIA, Solidworks, NX, ProEngineer, Inventor and Parametric CAD import. Training classes available at additional cost and updates for 1 year. Inspire provided with licence code.

SpatialAnalyzer®




Powerful and traceable measurement and analysis software

SpatialAnalyzer® (SA) is a powerful, traceable and easy to use metrology and analysis software package, tailored for Hexagon's Manufacturing Intelligence portable CMM family.

SA offers a vast number of benefits, including:

- Intuitive, state of the art graphical environment.
- Interfaces to all Hexagon Manufacturing Intelligence portable CMMs.
- All common CAD exchange and native formats.
- Advanced analysis and processing and unique alignment techniques.
- Easy multiple-instrument station bundling.
- True GD&T and feature checks.
- Numerous reporting options.
- Measurement uncertainty calculation.
- Unified Spatial Metrology Network to achieve the ideal instrument network.
- Integrated Modern Scripting Language to automate complete workflows.
- Multiple language support.
- Free SA Viewer to share SA job files easily.

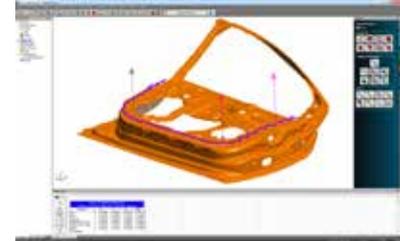

SpatialAnalyzer® makes metrology easy.

PC-DMIS Portable



User-friendly measurement software for portable probing and scanning

Portable measurement devices have changed the way operations are monitored, making it possible to take measurements and analyse the results directly where parts are made and assembled. PC-DMIS Portable provides the tools needed to more effectively monitor operations and identify minor issues before they turn into costly problems.

PC-DMIS CAD++ Probing


Includes LMS license + all Portable interface (ROY-I-PORTABLE) + XACT GD&T + IGES / DXF / DWG / STEP203 / STEP 214 / VDAFS / XYZIJK / DES and DMISI/O translators and updates for 1 year

PC-DMIS CAD++ Scanning

Includes LMS license + All Portable interfaces (ROY-I-PORTABLE) + Hexagon Scanning Probe Interface + Scanning Auto Features + Full COP support + XACT GD&T + IGES / DXF / DWG / STEP203 / STEP 214 / VDAFS / XYZIJK / DES and DMISI/O translators and updates for 1 year.

PC-DMIS CAD++ Scanning/Mesh

Includes LMS license + all Portable interfaces (ROY-I-PORTABLE) + Hexagon Scanning Probe Interface + Scanning Auto Features + Full COP support + XACT GD&T, IGES / DXF / DWG / STEP203 / STEP 214 / VDAFS / XYZIJK / DES and DMISI/O translators + STL Mesh Creation and Inspection and updates for 1 year.

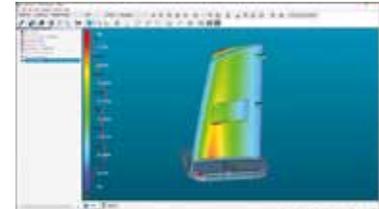

VISI Reverse


The shortcut from 3D scan to manufacturing

VISI Reverse, an intuitive module that can be added to the mold and stamping industry leader VISI application from Hexagon, combines hybrid modelling CAD functionality with 3D scan data processing abilities so that easily customers can create fully compatible editable solid models starting from digitized/scanned data.

Features at a glance:

- Direct import of point cloud from scanning device
- Automatic mesh creation / cleaning / smoothing
- Dynamic wireframe grid construction
- Automatic surface creation

Powerful and Flexible. VISI Reverse is born to import unlimited scanned data directly from Hexagon portable devices such as the Absolute Arm or the Leica Absolute tracker, or from a generic CSV file format and to convert these data point clouds into a usable mesh, a fully editable geometrical model or a hybrid model.

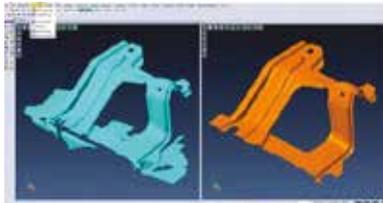

REcreate

The reverse engineering software that perfectly combines powerful capability with an optimal user experience


REcreate takes the complexity out of reverse engineering to create a smarter, faster and more flexible design and production environment for modelling new products and for repairing or replacing parts.

Making sophisticated design simple

Highly flexible, REcreate stands apart from traditional reverse engineering software by incorporating a CAD system that can create 2D drawings as well as CAD models. REcreate fits into any existing production workflow and is versatile enough to be used as a standalone product, working with machines that don't use CAM data, or as part of an end-to-end CAD to CAM solution. Other key functionalities include direct modelling, which makes it easy for users to form the shape they require.

A full range of reverse engineering applications

The ease-of-use and interoperability of REcreate make it simple for users to capture data by connecting directly to scanning devices or importing mesh, solid, surface or point cloud data. They can model designs in a single environment using a full array of modelling data and manufacture using CAD/CAM – as well as validate quality. And they can start at whichever point in the reverse engineering process that best suits their needs.

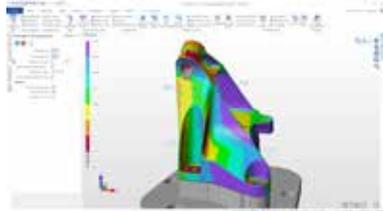

TRAC-CHECK

For check of large machine tools according to traceable standards


For large machine tools (> 5 m) it is also possible to use a laser tracker from Hexagon to check machine accuracy according to standards by the software ETALON TRAC-CHECK.

ETALON TRAC-CHECK software solution

Innovative measuring software to ensure machine tools meet international standards for precision

The ETALON system uses multilateration, a spatial measurement technique deployed by satellite navigation systems, to increase measurement speeds and ensure the highest levels of accuracy when calibrating, compensating and verifying machine tools. The speed and precision of multilateration means manufacturers can reduce measurement times by up to 80% compared to conventional laser interferometers, thereby securing results in one to two hours instead of one to two days.

ETALON TRAC-CAL | TRAC-CHECK uses a single self-tracking laser interferometer either from ETALON or the Leica Absolute Tracker AT930/960. This makes measurements more accurate and traceable, while reducing the maintenance and recalibration costs.

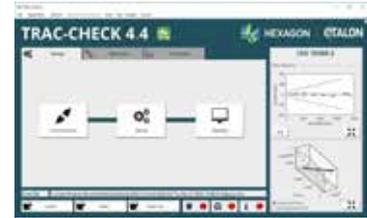

RoboDyn

For check of robot according to traceable standards


Innovative software solution delivering full calibration and performance testing functionality for industrial robotic systems.

The RoboDyn robot calibration and inspection system delivers complete robotic control, making it simple to get the most out of the precision, flexibility and intelligence automated systems have to offer.

With the ability to calculate robot base alignment and tool centre point offsets as well as directly correct and compensate for robot parameters, the RoboDyn software is the perfect tool for improving absolute positioning and performance of robotics. Designed to meet the demands of the ISO 9283 standard, RoboDyn guarantees accuracy and reliability throughout automated operations.

Simple and easy to use, RoboDyn allows for on-the-spot modification of robot models, followed by fast recalibration. Coming alongside the full capability for offline simulation, RoboDyn has the potential to transform process productivity across manufacturing, installation, testing and logistics areas.

For static and dynamic data acquisition, RoboDyn requires use in conjunction with a quality Leica Absolute Tracker featuring precision, speed, large measurement range, portability and the capacity for 6DoF measurement.

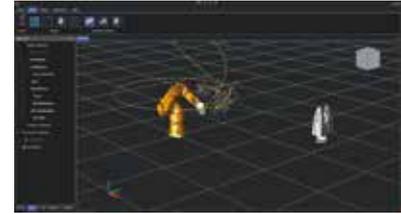

Third-party software

PolyWorks®



Polyworks is a software solution for high-end point cloud inspection and reverse engineering applications.

Whether you are casting, milling, molding or stamping, you can rely on PolyWorks to provide a complete solution for your process. The PolyWorks software suite is available as a complete package or - with regard to the two main applications - as a point cloud inspection or reverse engineering package.

PolyWorks®, developed by InnovMetric Software Inc, Canada, is a solution for high-end point cloud inspection and reverse engineering applications.

Metrolog X4



The global 3D inspection software is a standard for measuring applications in automotive, aerospace and the general precision industry.

Metrolog X4 interfaces to the Absolute Trackers, the “Walk-Around” Leica T-Probe, the Leica T-Scan and the Absolute Scanner AS1. In addition, more than 50 interfaces for CMMs and PCMMs are available. The graphical visualisation provides direct interfaces for virtual any neutral and native CAD format. A powerful feature-based measurement tool, a complete GD&T engine, customizable reporting and a simple and fast programming language, support and simplify your sophisticated assembly and inspection processes. Metrolog X4 is available in 19 languages.

Metrolog X4, developed by Metrologic Group of Europe, the global 3D inspection software is a standard for measuring applications in automotive, aerospace and the general precision industry.

DM Works



DMWorks is a software package for automated applications comprised of different modules. It allows the creation of a measurement cell, the running of simulations, the generation of robot paths and even control of a measurement cell.

DMWorks-LSA (Leica Scan Automation):

- General purpose virtual measurement simulation and robot offline programming software for multiple LSA systems
- Accurately arrange and create virtual measurement workcell by aligning all devices to minimise position errors between virtual and physical systems
- Generate optimised robot scanning path for each measurement feature with robot motion simulation.

LSA-Controller

- Integrated measurement control and operation software for one specific LSA system
- Collect and display real-time scanned point cloud data that can be transferred for analysis
- Provides a simple procedure for system recovery when system error occurs

LSA - Simulator

- OLP simulator for one specific LSA system
- Virtual measurement simulation
- Virtual measurement workcell alignment
- Offline robot programming

Silma / X4-iRobot



Silma is the advanced simulation software package from Metrologic which enables the creation of part program offlines, to check for risk of collision and path optimization. The Metrolog X4 i-Robot is the software package which runs the robot and measurement program in a single package, providing reports in a single software platform.



HxGN Sfx | Asset Management

The smart choice for smart manufacturing



Real-time performance data in a centralised user-friendly dashboard, now as standard

HxGN Sfx | Asset Management delivers a simple, accurate and reliable way to monitor and analyse how key assets are performing via a centralised, user-friendly dashboard, whether on a single site or distributed across multiple locations around the world.

This future-proof solution provides manufacturers with easy and intuitive access to important information in real-time to allow for better informed decision making. Smart measurement and smart monitoring are the future of smart manufacturing.

- Monitor and manage device status, usage and performance.
- Securely access information from anywhere in real time.
- Identify production bottlenecks and other sources of inefficiency.
- Receive customisable critical event notifications.
- Easily locate individual or fleets of portable assets with GPS tracking.
- Track assets across a single site or at multiple worldwide locations.



The Sfx Asset Management solution is fully compatible with AT960, AT930 and ATS600 Absolute Tracker models. Every model in the Absolute Tracker range now includes a year’s subscription to HxGN Sfx | Asset Management PRO and a free GPS location add-on as standard.



World-class products to rely on

Drawing on decades of research and development experience, laser tracker technology from Hexagon's Manufacturing Intelligence division is built on a long history of outperforming technological innovation. Deriving quality from experience to drive productivity is what keeps Hexagon in front and able to deliver first-class solutions for industries around the world.

That's why every major laser tracker product in this brochure comes with a 24-month factory warranty as standard, as well as a guaranteed 10 years of serviceability through official Hexagon service channels.

World-class support delivered locally

The international presence of Hexagon guarantees comprehensive aftersales support and services across the globe. With the largest dedicated service team of any metrology equipment manufacturer and an emphasis on locally delivered solutions, Hexagon is unmatched from service, repair, certification and calibration through operator training and software maintenance and upgrades.



- Customer and demo centre
- Production facility
- Tracker service centre

World-class service made simple

Hexagon offers a wide range of support services extending well beyond the point of purchase. Delivered by experienced and skilled engineers at ISO-certified laboratories, local Hexagon Precision Centres or even on-site to minimise downtime, our after-sales portfolio is the most complete on the market.

- Maintenance and warranty plans that ensure equipment availability
- Trouble-free usage and minimal downtime
- Preferred hotline access at no additional cost
- Access to professional advice whenever needed

Customer Care Packages

Owners of the Hexagon laser tracker products featured in this brochure also have the opportunity to invest in a Customer Care Package designed to ensure equipment remains in top condition and can be relied on for accurate measurement results throughout a lifetime of use.

Customer Care Packages include a selection of the following benefits, depending on the tier chosen.

	Platinum	Gold	Silver	Bronze
Planned annual service	✓	✓	✓	✓
Customer hardware support	✓	✓	✓	✓
Annual maintenance and recertification	✓	✓	✓	
Remote connected assistance	✓	✓		
Repair parts and labour	✓			
Customised local benefits	✓	✓	✓	✓

For complete details of the benefits of each level of Customer Care Package, please contact a local Hexagon representative.



Hexagon is a global leader in sensor, software and autonomous solutions. We are putting data to work to boost efficiency, productivity, and quality across industrial, manufacturing, infrastructure, safety, and mobility applications.

Our technologies are shaping urban and production ecosystems to become increasingly connected and autonomous – ensuring a scalable, sustainable future.

Hexagon's Manufacturing Intelligence division provides solutions that utilise data from design and engineering, production and metrology to make manufacturing smarter. For more information, visit hexagonmi.com.

Learn more about Hexagon (Nasdaq Stockholm: HEXA B) at hexagon.com and follow us [@HexagonAB](https://twitter.com/HexagonAB).